


# Environmental & Water Quality Operational Studies



TECHNICAL REPORT E-81-5

## REAERATION THROUGH GATED-CONDUIT OUTLET WORKS



By Steven C. Wilhelms, Dennis R. Smith

Hydraulics Laboratory  
U. S. Army Engineer Waterways Experiment Station  
P. O. Box 631, Vicksburg, Miss. 39180

March 1981

Final Report

Approved For Public Release; Distribution Unlimited

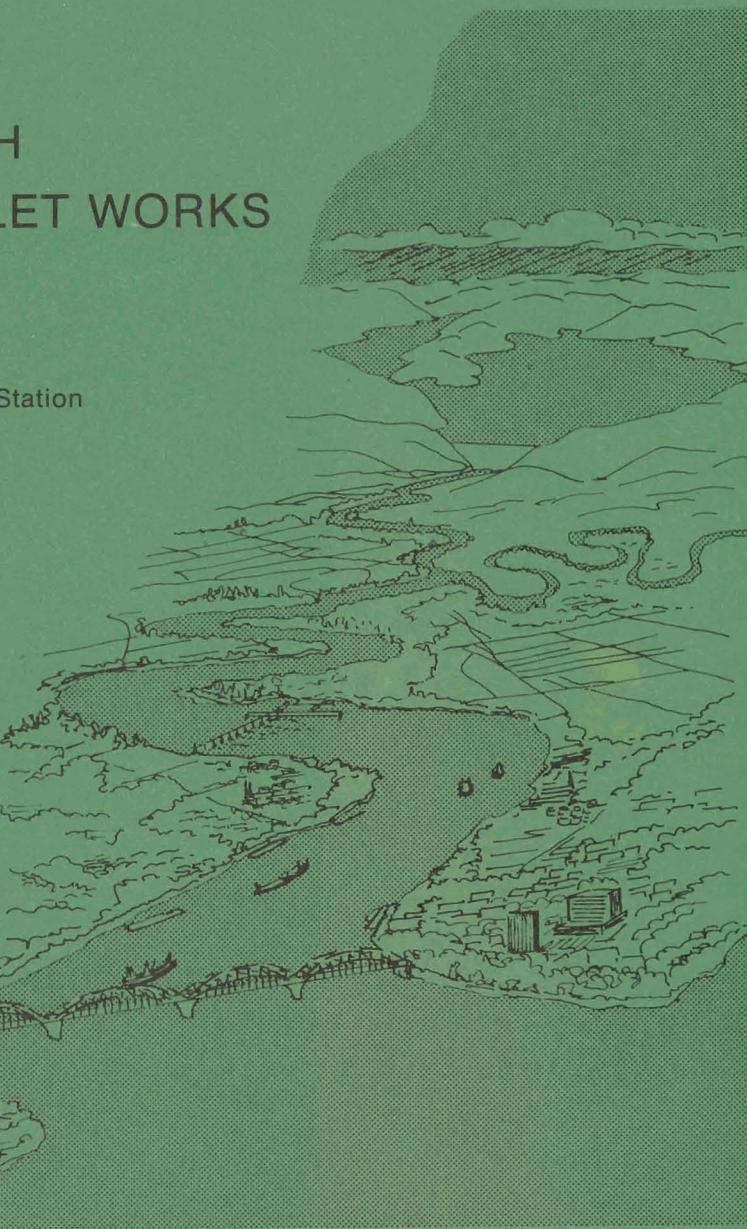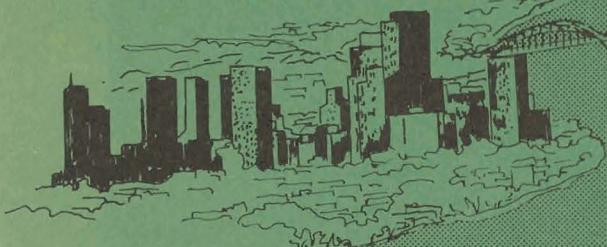

Prepared for Office, Chief of Engineers, U. S. Army  
Washington, D. C. 20314

Under CWIS No. 31402  
(EWQOS Work Unit 31604 (III A.1))

Monitored by Environmental Laboratory  
U. S. Army Engineer Waterways Experiment Station  
P. O. Box 631, Vicksburg, Miss. 39180



Unclassified

**SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)**

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

### Preface

This analysis was conducted at the U. S. Army Engineer Waterways Experiment Station (WES), CE, Hydraulics Laboratory (HL), from September 1976 to December 1978. This effort was initiated under work unit CWIS 31402, "Methods of Enhancing Water Quality," of the Reservoir Water Quality Research Program sponsored by the Office, Chief of Engineers. The effort was completed and the report published within the Environmental and Water Quality Operational Studies (EWQOS) under EWQOS Work Unit 31604 (III A.1).

Dr. J. L. Mahloch was Program Manager for EWQOS. Messrs. H. B. Simmons, Chief of the HL, and J. L. Grace, Jr., Chief of the Hydraulic Structures Division, directed the effort. Mr. Steven C. Wilhelms conducted the study and prepared the text under the direct supervision of Mr. D. G. Fontane, former Chief of the Reservoir Water Quality Branch (Physical). Dr. D. R. Smith, Chief of the Reservoir Water Quality Branch, assisted in the preparation and review of this report. Mr. M. E. Neumann assisted in the mathematical analysis of the data. Data were furnished by Mr. Glenn Drummond and other personnel of the Ohio River Division and by personnel from the Vicksburg District, CE.

COL John L. Cannon, CE, and COL Nelson P. Conover, CE, were Commanders and Directors of WES during this effort. Mr. Fred R. Brown was Technical Director.

This report should be cited as follows:

Wilhelms, Steven C., and Smith, Dennis R. 1981.  
"Reaeration Through Gated-Conduit Outlet Works,"  
Technical Report E-81-5, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.

## Contents

	<u>Page</u>
Preface . . . . .	1
Conversion Factors, U. S. Customary Units to Metric (SI)	
Units of Measurement . . . . .	3
Introduction . . . . .	4
Objectives . . . . .	5
Scope . . . . .	5
Approach . . . . .	5
Energy Dissipation Model . . . . .	7
Deficit Ratio Model . . . . .	10
Results . . . . .	12
Conclusions . . . . .	15
Recommendations . . . . .	21
References . . . . .	26
Plates 1-38	
Appendix A: Hydraulic and Predicted Data . . . . .	A1
Appendix B: Example Case for Prediction of Reaeration for Gated-Conduit Outlet Works . . . . .	B1
Synopsis of Procedure . . . . .	B2
Example Case . . . . .	B3
Tables B1 and B2	
Appendix C: SELECT Example . . . . .	C1

Conversion Factors, U. S. Customary To Metric (SI)  
Units of Measurement

U. S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	By	To Obtain
cubic feet per second	0.02832	cubic metres per second
Fahrenheit degrees	5/9	Celsius degrees or Kelvins*
feet	0.3048	metres
foot-pounds (force)	1.355818	metre-newtons or joules
pounds (force)	4.44822	newtons
square feet	0.09290304	square metres

---

\* To obtain Celsius (C) temperature readings from Fahrenheit (F) readings, use the following formula:  $C = (5/9)(F - 32)$ . To obtain Kelvin (K) readings, use:  $K = (5/9)(F - 32) + 273.15$ .

## REAERATION THROUGH GATED-CONDUIT OUTLET WORKS

### Introduction

1. It is often possible to enhance the water quality of releases from reservoirs by employing outlet works that aerate the flow. This is especially important if the water entering the outlet works is low in dissolved oxygen (D.O.), since many kinds of aquatic life cannot survive in a low D.O. environment. To design structures that effectively aerate the release water, predictive techniques are required that quantify the gas transfer that results with flow through a particular structure of interest. Few predictive techniques have been developed or applied to hydraulic structures.

2. The development of generalized equations applicable to arbitrary structural designs is extremely difficult. Reaeration during flow through hydraulic structures depends upon molecular diffusion and the magnitude of dispersion due to turbulent mixing. In most instances, turbulence is the physical mechanism that dominates the rate of gas transfer. Numerical modeling of turbulence to accurately describe gas-transfer processes in self-aerated flows requires a data base and modeling techniques in excess of those currently available. Reaeration occurring during flow through hydraulic structures is currently predicted on a very limited basis by use of semiempirical or empirical mathematical models of the reaeration process. For any of these models, the coefficients must be determined experimentally and the models compared to determine the most applicable. Above all, the models should not be applied indiscriminately outside of the flow regime for which the coefficients were developed. It is imperative to investigate the adequacy of the respective models for predicting reaeration in hydraulic structures.

3. Two models were analyzed and evaluated regarding reaeration occurring through outlet works: (a) Energy Dissipation Model (EDM) (Tsivoglou and Wallace 1972) and (b) Deficit Ratio Model (DRM) (Holler 1970). These two were chosen because they are relatively simple mathematical models that predict the gas transfer as a function of the total energy dissipated.

### Objectives

4. The objectives of this study were as follows:
  - a. To analyze and document existing D.O. data for gated-conduit release structures.
  - b. To provide a qualitative and quantitative evaluation of the gas-transfer characteristics of existing structures of this type.
  - c. To test the applicability of the EDM and DRM for predicting oxygen uptake through reservoir outlet works.

### Scope

5. This report addresses reservoir outlet works consisting of intake structures, conduits, and stilling basins (Figure 1). Analysis of D.O. data from several U. S. Army Corps of Engineers projects is reported herein. Drawings of the projects are presented in Plates 1-12. All of these outlet works exhibited similar hydraulic conditions inasmuch as there was free-surface flow through the conduit and the outlet portal was not submerged by the tailwater.

### Approach

6. The data available for analysis were observed D.O. and temperature profiles in the lake and downstream D.O. and temperature (Plates 13-38). Prediction of the D.O. and temperature entering the structure was required. A generalized selective withdrawal technique (Bohan and Grace 1973), "SELECT," developed at the U. S. Army Engineer Waterways Experiment Station (WES), CE, was verified for applicability to the hydraulic structures by predicting release temperatures and comparing the predictions with the observed release temperatures. This was possible because there is negligible heat transfer between the release water and structure. SELECT was then used to predict D.O. content of the water entering the hydraulic structure. These predictions were used in a qualitative evaluation of the reaeration occurring through the

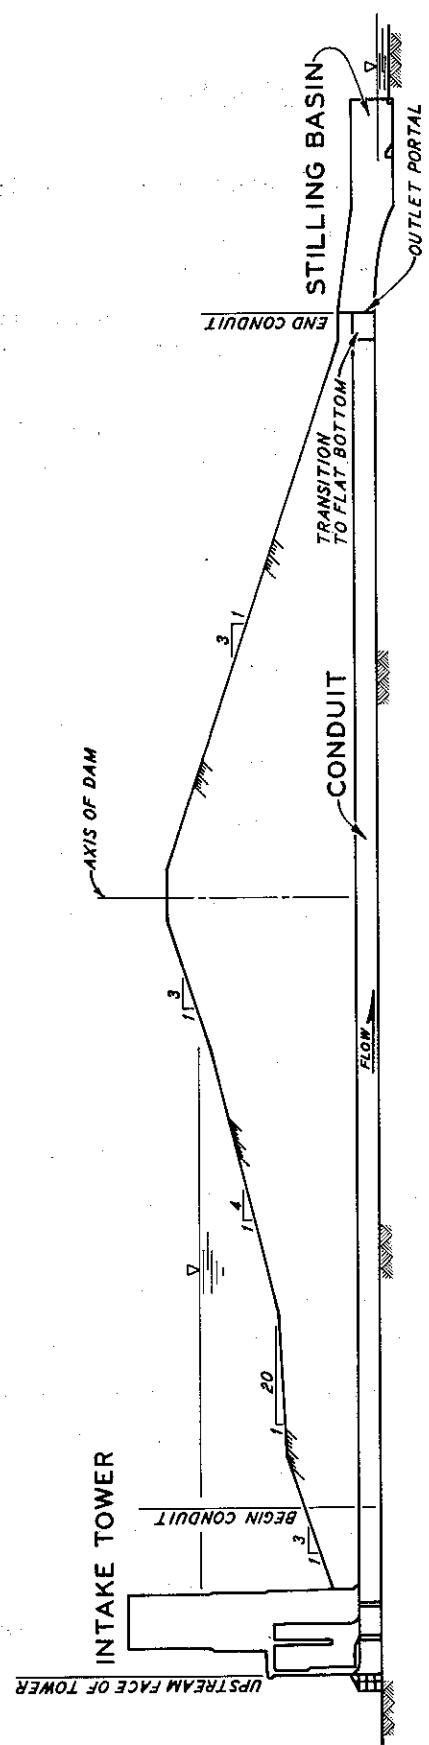


Figure 1. Intake structure, conduit, and stilling basin

structures and as input to the EDM and DRM (Appendix A).

#### Energy Dissipation Model

7. The EDM, which was developed for streams, states that the re-aeration rate coefficient is proportional to the rate of energy dissipation. The model is expressed mathematically as

$$K_2 = c \frac{\Delta E}{t_f} \quad (1)$$

where

$K_2$  = reaeration or gas-transfer coefficient, base e, per sec

c = escape coefficient, per ft\* of energy loss


$\Delta E$  = energy expended from upstream point to downstream point, ft-lb per lb of water

$t_f$  = time of flow from upstream to downstream, sec

The total energy dissipated between upstream and downstream points is the sum of the irreversible losses in kinetic and potential energy, which can be expressed as

$$\Delta E = \frac{v_1^2 - v_2^2}{2g} + (H_1 + z_1) - (H_2 + z_2) \quad (2)$$

where the variables are defined by (Tsivoglou and Wallace 1972)

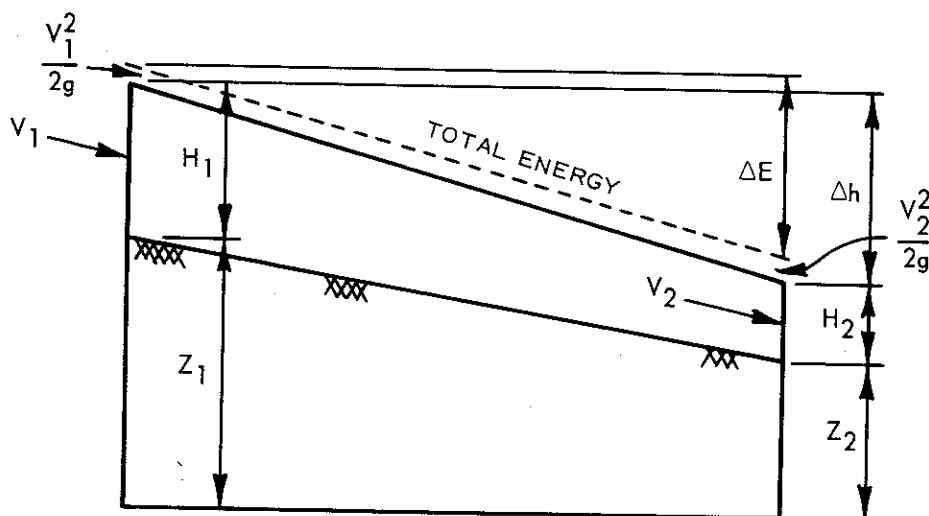

\* A table of factors for converting U. S. customary units of measurement to metric (SI) units is presented on page 3.

where

$v_1, v_2$  = velocity at respective locations, ft/sec  
 $H_1, H_2$  = depth of flow at respective locations, ft  
 $Z_1, Z_2$  = elevation of respective locations above some datum, ft  
 $g$  = acceleration due to gravity,  $\text{ft/sec}^2$   
 $\Delta h$  = water surface elevation change from upstream to downstream, ft

In the hydraulic structures analyzed, the velocity in the lake  $v_1$  was approximately zero, and the velocity in the exit channel  $v_2$  was small relative to its contribution to total head. Thus, the term

$$\frac{v_1^2 - v_2^2}{2g}$$

is negligible when compared to the elevation difference. Therefore,  $\Delta E$  can be closely approximated by  $\Delta h$  the water surface elevation change from upstream to downstream expressed in feet:

$$\Delta E \approx \Delta h = (H_1 + Z_1) - (H_2 + Z_2) \quad (3)$$

8. Assuming no chemical or biological oxygen consumption during flow through the structure, the downstream D.O. concentration can be estimated from a first order reaction equation (Streeter and Phelps 1925)

$$D_f = D_i \exp (-K_2 t_f) \quad (4)$$

where  $D_f$ ,  $D_i$  equals D.O. deficit downstream and upstream, respectively, mg/l. The oxygen deficit is defined as

$$D = C_{\text{sat}} - C_{\text{act}}$$

where

$D$  = D.O. deficit, mg/l  
 $C_{\text{sat}}$  = saturation concentration of D.O., mg/l  
 $C_{\text{act}}$  = actual concentration of D.O., mg/l

Combining Equations 1, 3, and 4 yields

$$D_f = D_i \exp (-c\Delta h) \quad (5)$$

the predictive EDM.

9. Tests on streams and rivers (Tsivoglou and Neal 1976) using a gaseous tracer (Tsivoglou et al. 1968) indicated that the escape coefficient for a particular reach was dependent on the streamflow rate. The stream observations were divided into groups according to discharge. The first group had discharges less than 10 cfs. The second group ranged in discharges up to 500-750 cfs. A third group was considered (>750 cfs), but insufficient data were available for analysis. This information implies that a single escape coefficient might be used to predict the D.O. uptake occurring in this type of structure by similar groupings of flow rates. Most flows in these projects were within the range of the second group, although a few were in the third group. None were in the first group.

10. The escape coefficient for gated-conduit structures was unknown, thus gas-transfer tests were conducted at the outlet works of Enid Lake, Mississippi,\* using a gaseous tracer technique (Tsivoglou et al. 1968). These tests indicated a value of 0.045 per ft as an overall escape coefficient for the Enid structure. This estimate of the escape coefficient, after adjustment for the ambient water temperatures by

$$c_T = c_{20} 1.022^{(T-20)}$$

where  $c_T$ ,  $c_{20}$  are escape coefficients at  $T^{\circ}\text{C}$  and  $20^{\circ}\text{C}$ , respectively, was used in the predictive EDM (Equation 5) to estimate oxygen uptake occurring in several hydraulic structures consisting of an intake structure, conduit, and stilling basin.

---

\* Unpublished data, C. H. Tate, Jr., August 1978, U. S. Army Engineer Waterways Experiment Station, Vicksburg, Mississippi.

### Deficit Ratio Model

11. Using the "two film" theory of mass transfer, the DRM can be expressed (Holler 1970)

$$r = \frac{D_i}{D_f} = \exp \left( \frac{k_l a t}{v} \right) \quad (6)$$

where

$r$  = deficit ratio

$k_l$  = liquid film coefficient

$a$  = air/liquid interface area

$t$  = time of contact

$v$  = volume of liquid

12. In a channel the average transit time can be approximated in terms of the channel volume and the average flow rate:

$$t = \frac{v}{Q}$$

where

$Q$  = flow rate

$t$  = time of flow

Substituting in Equation 6,

$$r = \exp \left( \frac{k_l a}{Q} t \right) \quad (7)$$

Using a Maclaurin's series to expand Equation 7 gives

$$r = 1 + \sum_{n=1}^{\infty} \frac{\left( \frac{k_l a}{Q} t \right)^n}{n!} \quad (8)$$

13. It has been theorized (Holler 1970) that the air liquid interface area  $a$  can be expressed as a function of momentum change occurring in a hydraulic jump or when a jet impinges on a surface. By substituting a momentum function for area and dropping higher order terms, Equation 8 can be expressed as

$$r = 1 + f(\Delta V)$$

where  $f(\Delta V)$  is some function of the velocity change. In Holler's (1970) work, the deficit ratio was experimentally related to  $\Delta V^2$  and yielded the DRM predictive model


$$r = 1 + \beta(\Delta V)^2 \quad (9)$$

where

$\Delta V$  = change in velocity, ft/sec

$\beta$  = coefficient,  $\text{sec}^2/\text{ft}^2$

For flow over a sharp-crested weir, kinematics can be used to relate the velocity of the jet to fall height by converting potential energy to kinetic energy KE of the jet.

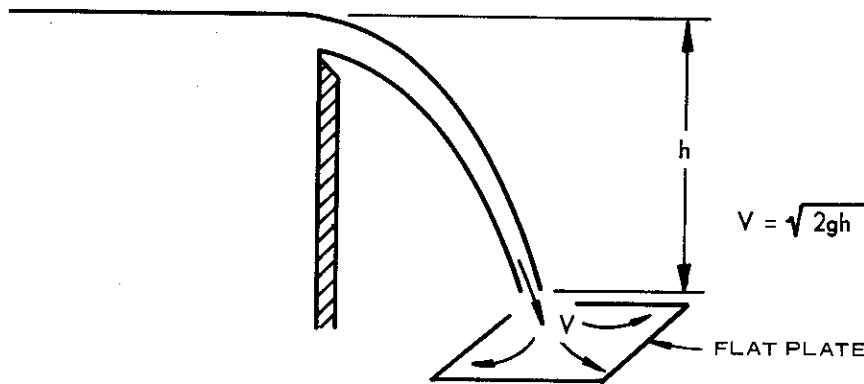


When the jet impinges on a flat plate, the momentum change is reflected in a velocity change. The velocity change along the axis of the jet is

$$\Delta V = V$$

since there is no velocity along the direction of the jet after impact. The potential energy is converted to kinetic energy and a large part of the KE is dissipated in the impact. Holler (1970) substituted  $h$  for  $\Delta V^2$  for the experimental work performed on sharp-crested weirs. In hydraulic structures, the change of potential energy to kinetic energy and subsequent dissipation is analogous, even though the energy

is not dissipated in a single impact. Thus,  $\Delta h$ , the difference in pool and tailwater elevations, was used as an estimate for  $\Delta V^2$  in Equation 9 with the constant  $2g$  taken into account in the coefficient  $\beta'$ .

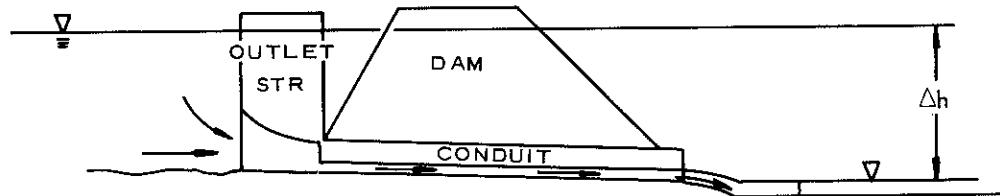

Holler determined experimentally that  $\beta'$  was 0.065 per ft for discharges over low-head submerged tainter gate spillway structures. Therefore,

$$r = 1 + 0.065\Delta h \quad (10)$$

Equation 10 was used to predict D.O. uptake through the same structures used in the EDM analysis. Observed D.O. data at the structures were compared to predicted D.O.

#### Results

14. Plates 13-38 document the data used in this analysis of reaeration through selected outlet works. D.O. and temperature profiles for the lakes are plotted, and observed downstream D.O. and temperature measurements are given. The Beltzville data are documented in Hart and Wilhelms (1977). Other hydraulic and predicted data are presented in Appendix A. Release water temperatures were predicted with SELECT. Figure 2 shows the SELECT-predicted release temperature plotted against the observed release temperature. The standard deviation (Miller and Freund 1977) for SELECT-predicted temperatures was  $\pm 2.0^\circ\text{C}$ .

15. The data from all the projects indicated that reaeration through the structures was sufficient to raise the downstream D.O. to approximately 80-100 percent of saturation regardless of the flow and initial D.O. content. Figure 3 shows change of percent saturation plotted against initial saturation. The upstream deficit  $D_i$  was

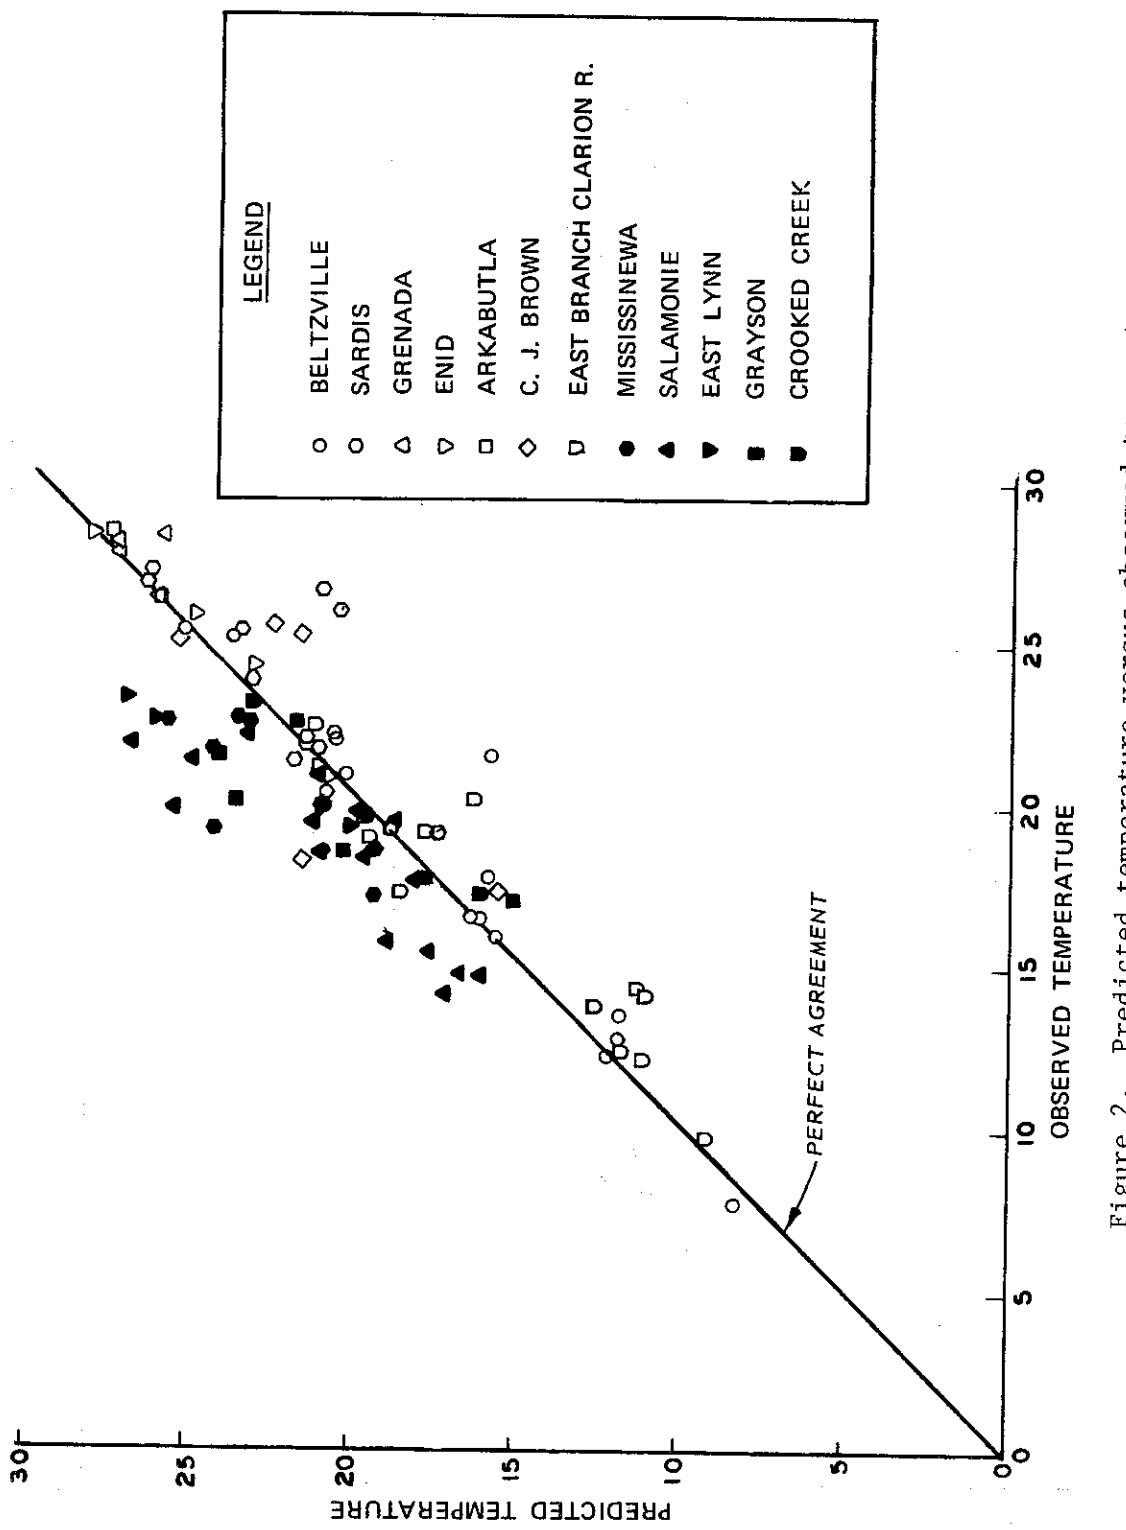


Figure 2. Predicted temperature versus observed temperature

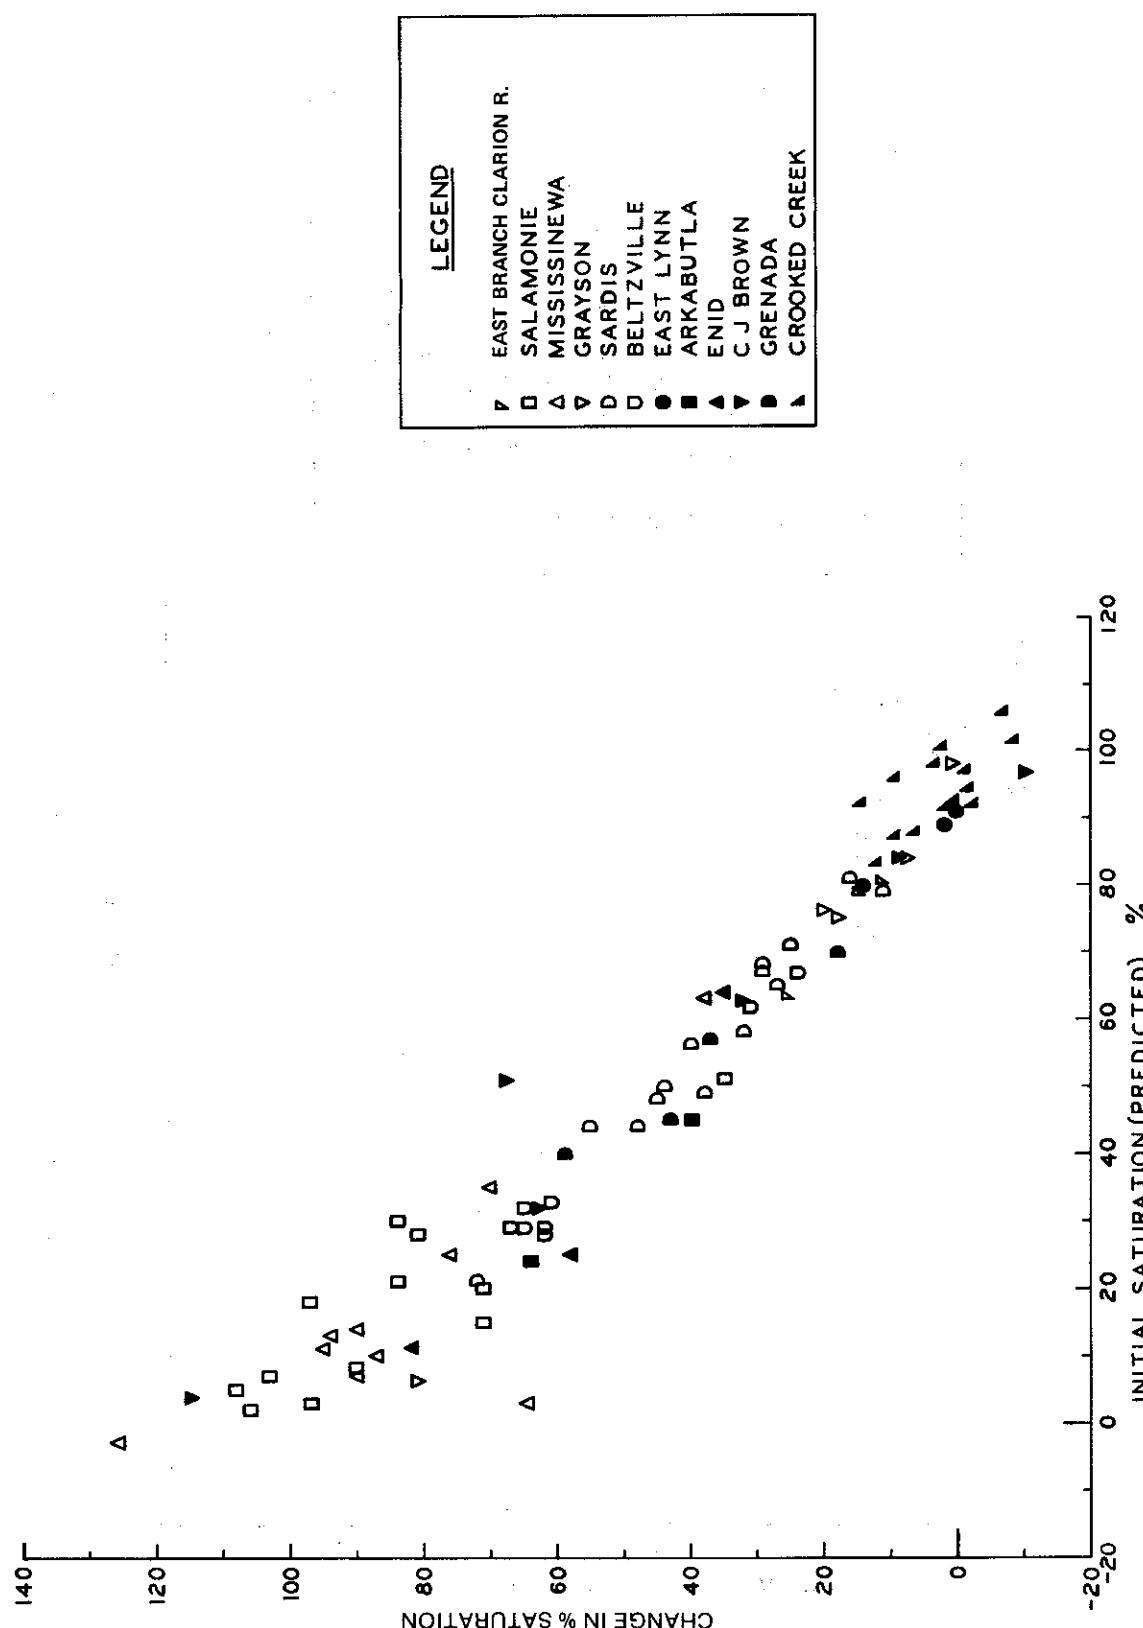


Figure 3. Change in D.O. saturation versus initial saturation

predicted with SELECT. Final saturation was computed from observed data.

16. The EDM predictive model was used to estimate the downstream deficit  $D_f$ . Predictions made with this model were compared to observed data (Figure 4). The predicted data varied with a standard error (Miller and Freund 1977) of  $\pm 0.7 \text{ mg/l}$ . D.O. predictions were also made with the DRM and were compared to observed downstream D.O. These comparisons are presented in Figure 5. Standard error for these predictions was  $\pm 0.9 \text{ mg/l}$ .

### Conclusions

17. All the projects analyzed indicated that releases reaerated to approximately 90 percent of saturation. A common minimum release D.O. objective as established by some state standards is  $5.0 \text{ mg/l}$ . Data clearly indicated that these gated-conduit structures successfully met this standard.

18. Most D.O. predictions made with the EDM using an escape coefficient  $c_{20} = 0.045 \text{ per ft}$  compared favorably with observed D.O. The agreement between observed and predicted data was very good, considering the inherent variability in the data and the hydraulic differences among the structures. It is probable that the escape coefficients vary slightly from project to project and with flow for a particular structure because of differences in levels of turbulence, geometry, or other factors that affect the hydraulics and hydrodynamics of the flow through the structure.

19. Using a  $c_{20}$  of  $0.045 \text{ per ft}$  for gated-conduit structures with the range of flow rates investigated is consistent with river and stream investigations (Tsivoglou and Neal 1976), which have indicated an average  $c_{20}$  of  $0.054 \text{ per ft}$  for flow rates similar to those encountered in these projects. It was concluded from those studies that as the flow increases, the  $c_{20}$  should be adjusted downward toward a limiting value of approximately  $0.025$  to  $0.030 \text{ per ft}$ .

20. D.O. predictions made with the DRM (Figure 5) tend to be

$$D_f = D_i e^{-0.45 \Delta h}$$

$$DO_{pred} = DO_{SAT} - D_f$$

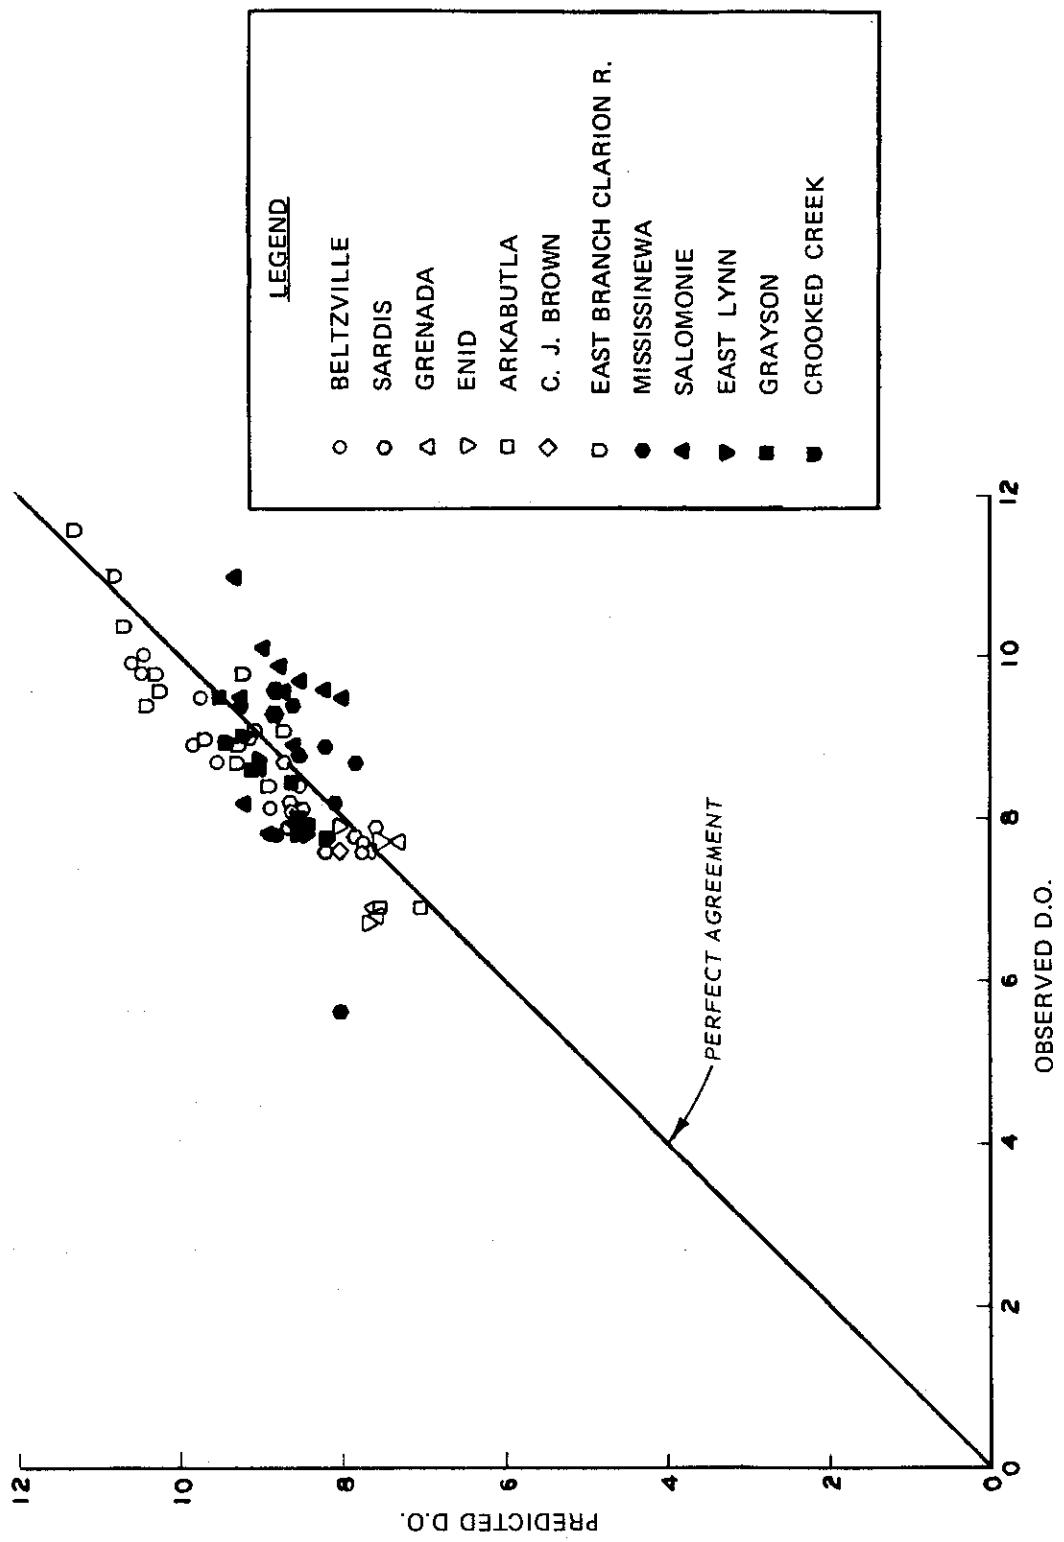


Figure 4. EDM-predicted D.O. versus observed D.O.

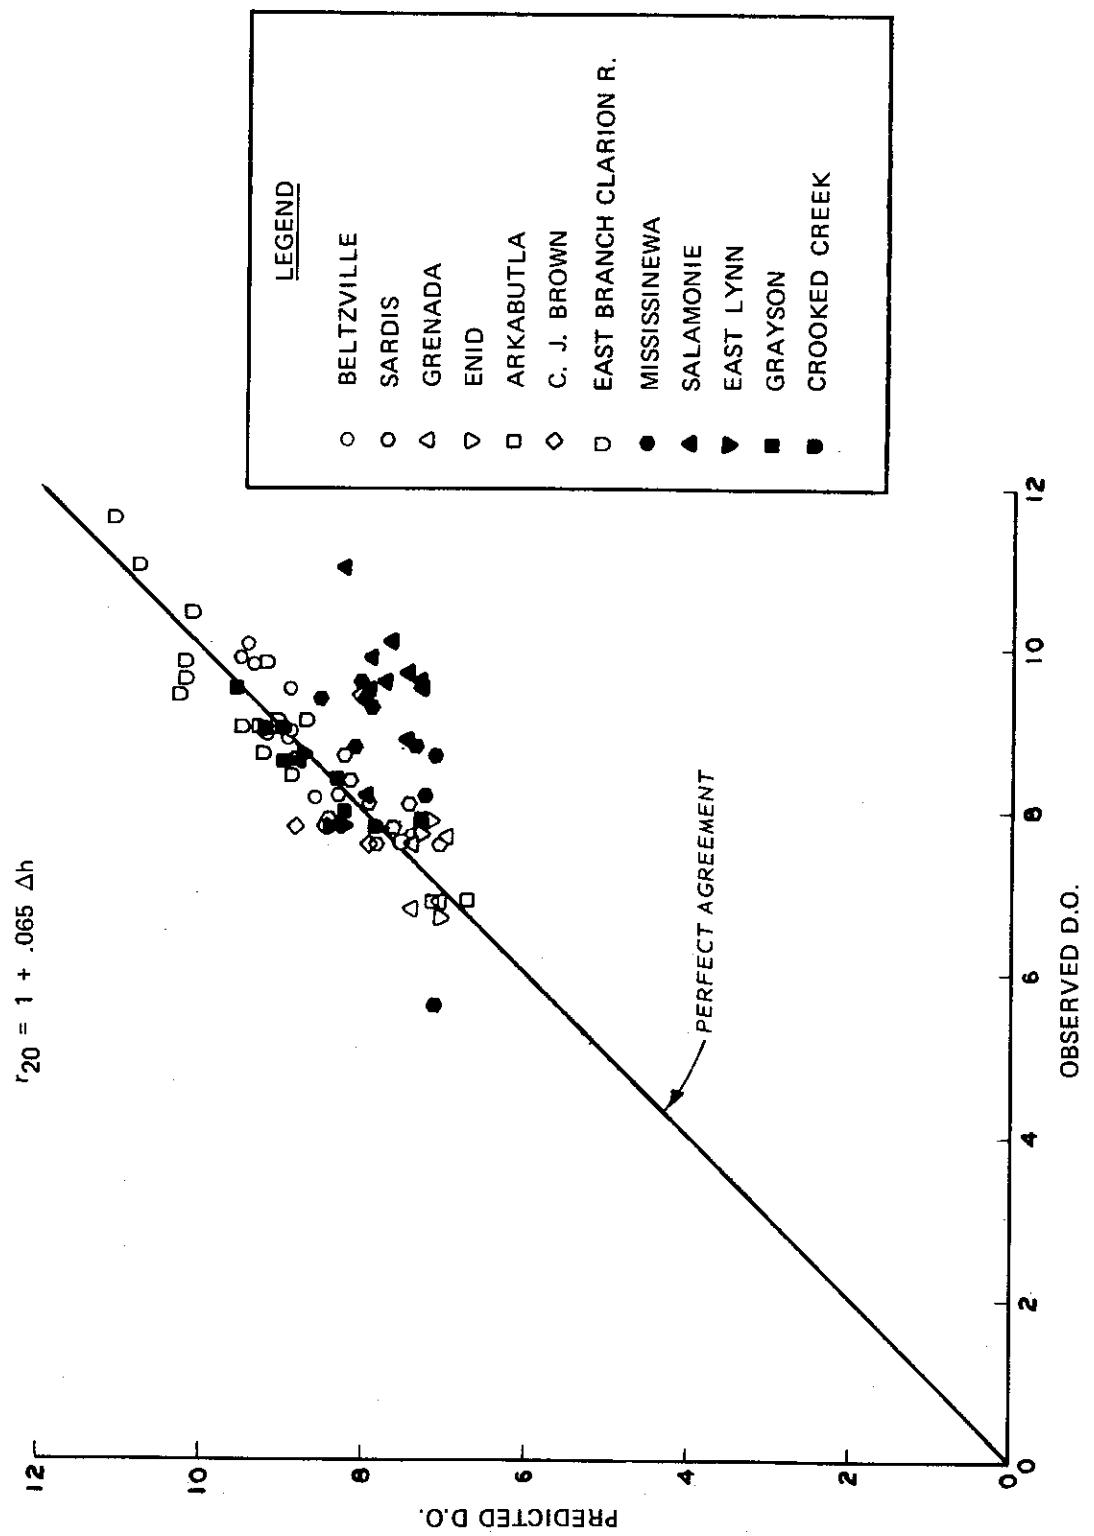


Figure 5. Holler's (1970) DRM-predicted D.O. versus observed D.O.

lower than observed D.O. levels. This implies that the coefficient  $\beta'$  in the DRM, which was developed for low heads, should be larger for high-head structures to increase predicted downstream D.O. concentration. The analysis of data obtained from the tracer studies at Enid Lake\* resulted in a  $\beta'$  coefficient of 0.200 per ft. Predictions made with the DRM with this coefficient are shown in Figure 6. The standard error (Miller and Freund 1977) of prediction was  $\pm 0.8$  mg/l as compared to 0.9 mg/l obtained with  $\beta'$  of 0.065 per ft developed for low-head structures.

21. The above results indicate that there is very little difference in the standard errors for the EDM model (calibrated with the Enid outlets work data), the DRM calibrated with low-head data, and the DRM calibrated with the Enid data. This implication is somewhat misleading, since there are fundamental differences in the models. The differences can be clearly delineated by comparing plots of the respective equations.

22. In Figure 7 the DRM developed by Holler (1970) for low-head submergible tainter gates can be compared with the EDM calibrated with the Enid data. The DRM has been inverted to provide consistency in the comparison. The models predict essentially identical deficit ratios for heads less than approximately 20 ft and consequently are equally valid. However, above 20 ft, the differences in predicted deficit ratios increase. The difference at larger heads is inherent in the derivation of the respective models. Both assume a first order process that is normally expressed mathematically as an exponential process. However, the DRM employs a truncated Maclaurin's series expansion to describe the exponential process. As a result, the DRM is mathematically valid only in the range of heads for which the truncated Maclaurin series approximates the exponential. The range for which it will be valid depends upon the range of heads over which the empirical coefficient was determined. Holler calibrated the DRM for low-head structures and consequently the model yields less accurate predictions for heads greater than 20 ft.

---

\* Unpublished data, C. H. Tate, Jr., August 1978, U. S. Army Engineer Waterways Experiment Station, Vicksburg, Mississippi.

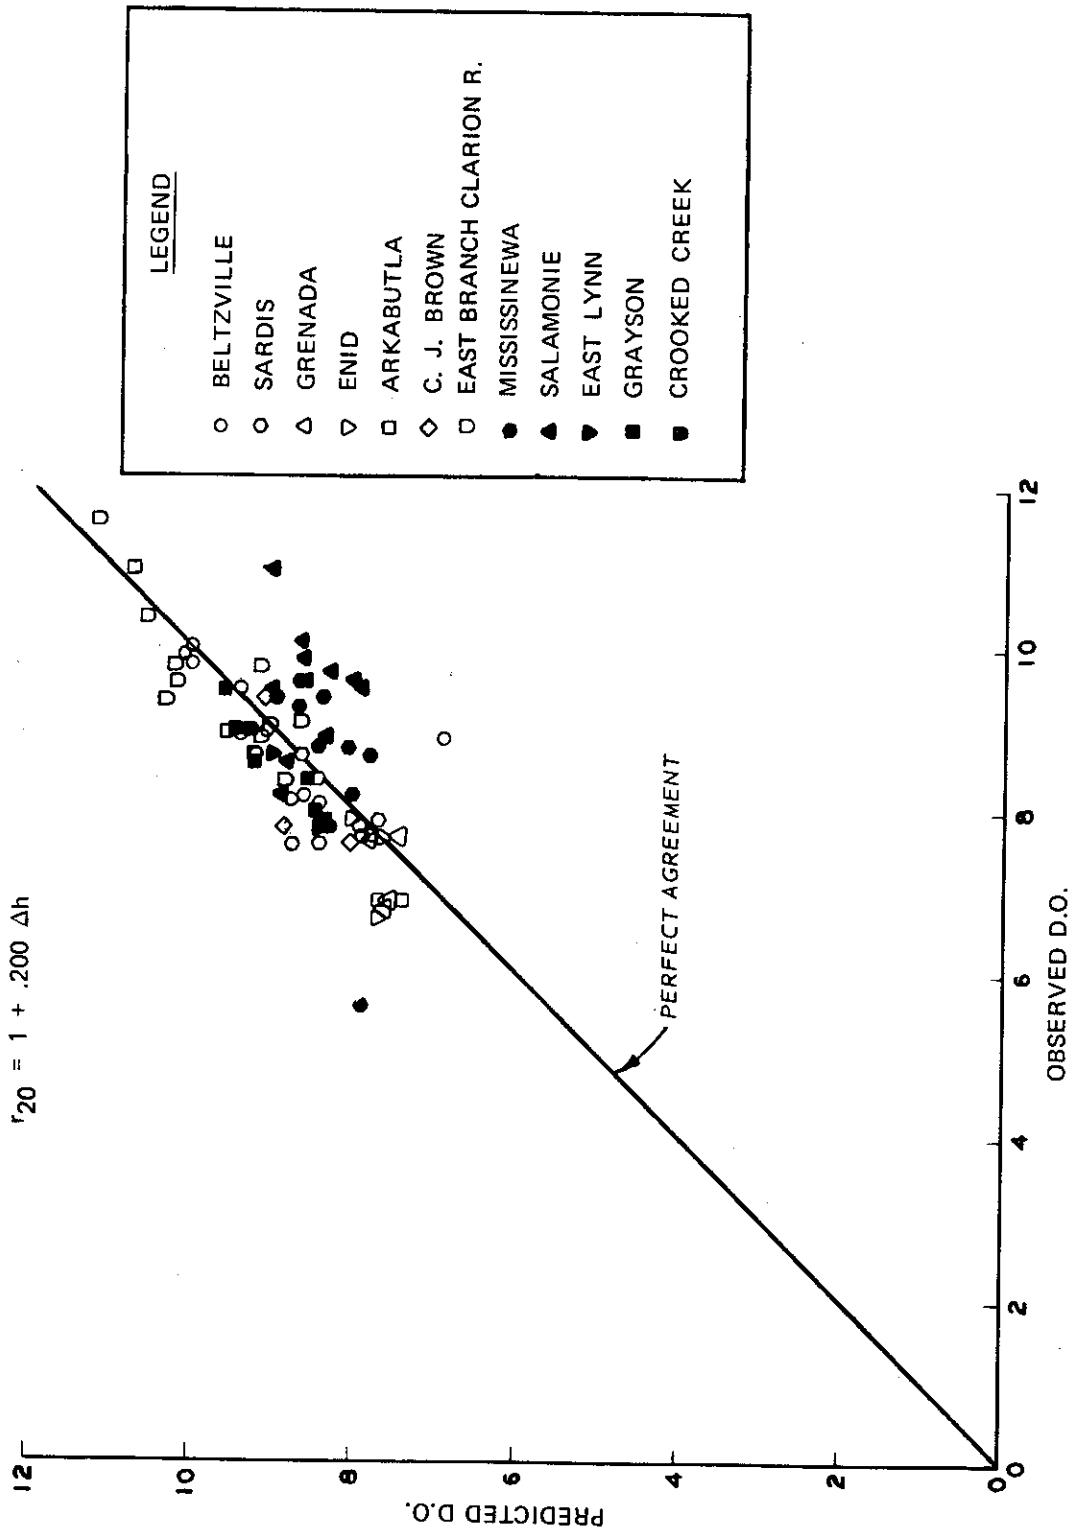


Figure 6. DRM-predicted D.O. versus observed D.O.

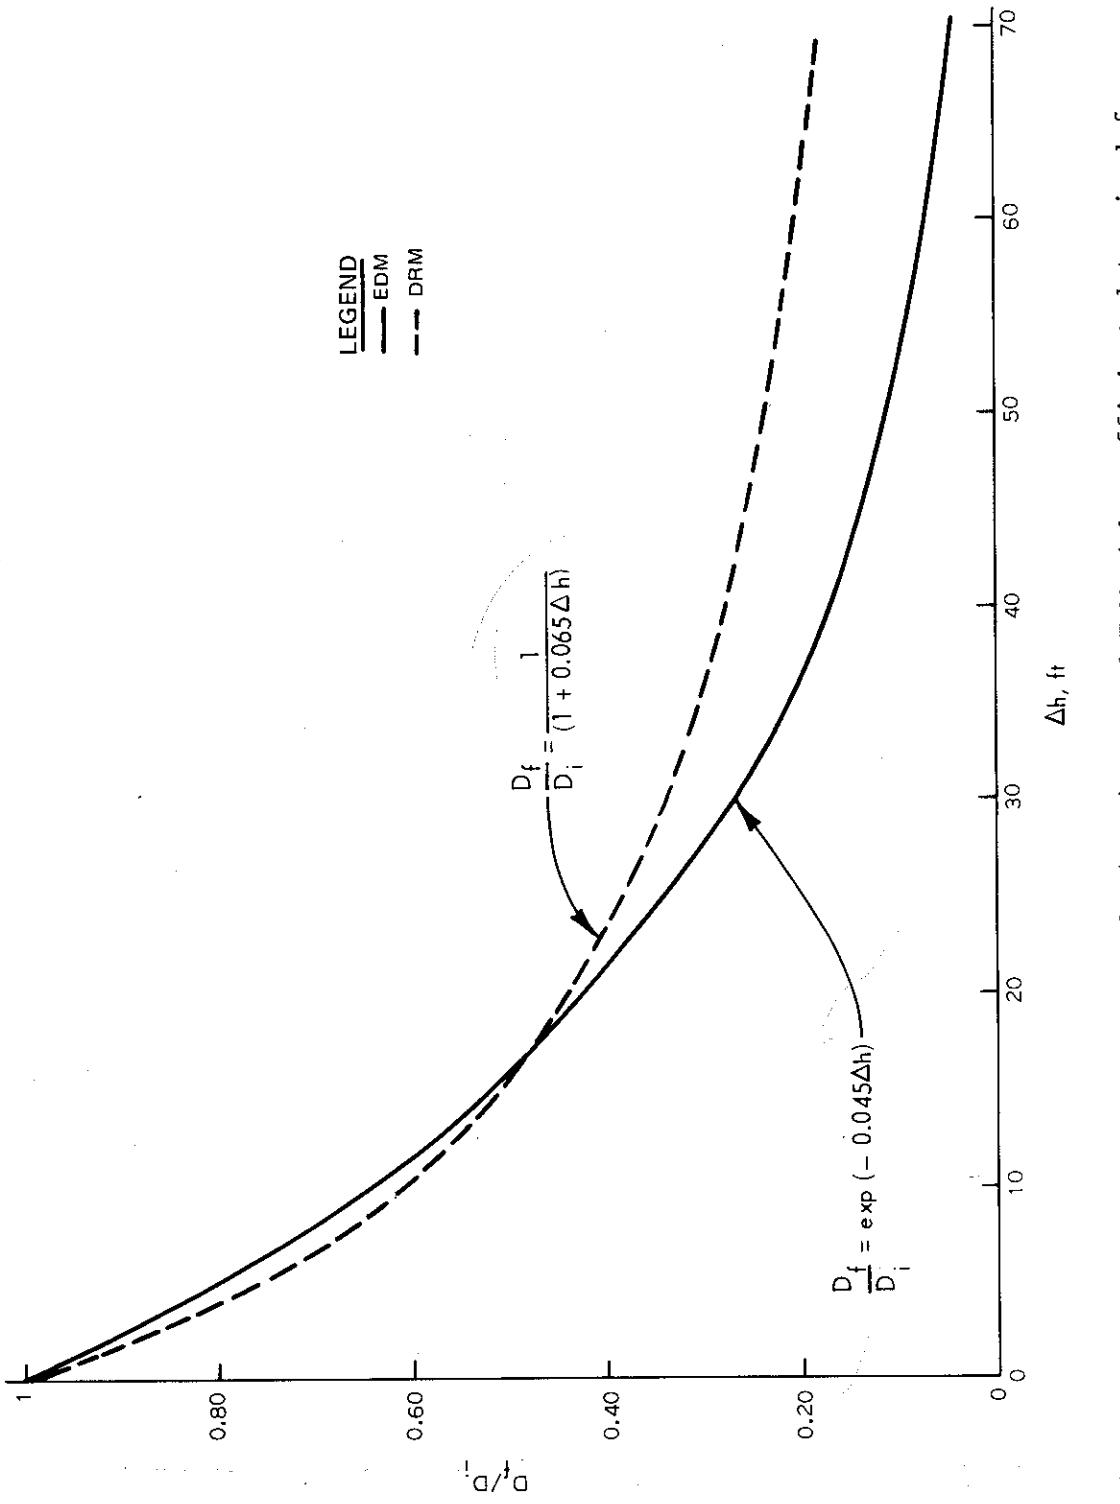


Figure 7. Comparison of Holler's (1970) DRM and EDM with coefficient determined from  
Enid Outlet Works

23. Although the DRM calibrated for low-head structures is not rigorously valid at high heads, large predictive errors will not necessarily result. As indicated in paragraph 16, the standard error of prediction with the DRM (calibrated for low-head structures) and the EDM (calibrated with Enid data) was 0.9 and 0.7 mg/l, respectively. This occurs because the final D.O. concentration asymptotically approaches saturation as the head is increased. Consequently, at large heads, the deficit ratios became small, which results in relative insensitivity of the final D.O. to the deficit ratio. The absolute error in D.O. prediction will be small; however, the DRM will tend to predict a lower final D.O. than actually exists. This result is clearly indicated by the plots in Figure 7 and is verified by the comparison of predicted and observed results in Figure 5.

24. It is possible to calibrate the DRM for large-head structures; however, large changes in the experimentally determined coefficient result. Calibrating the DRM with Enid data resulted in a  $\beta'$  of 0.200 per ft as compared to 0.065 per ft for low-head structures. As indicated in Figure 8, with this modification the DRM and EDM predict essentially equivalent results for heads of 50-70 ft. This is also reflected in Figures 4 and 6, which compare predicted and measured D.O. for the EDM and DRM, respectively. DRM, calibrated for large heads, should not be used for low-head structures. As indicated in Figure 7, very large errors would result.

#### Recommendations

25. The EDM should be used instead of the DRM to predict D.O. The EDM with an escape coefficient of 0.045 per ft predicts the deficit ratio for low-head structures as well as the DRM does. Additionally the EDM predicts D.O. for high heads (>25 ft) without modifying the experimentally determined coefficient. In comparison, large changes in the experimentally determined coefficient are required for the DRM to achieve equivalent accuracy. The assumptions upon which the DRM is based severely restrict the range of heads for which the equation is valid.

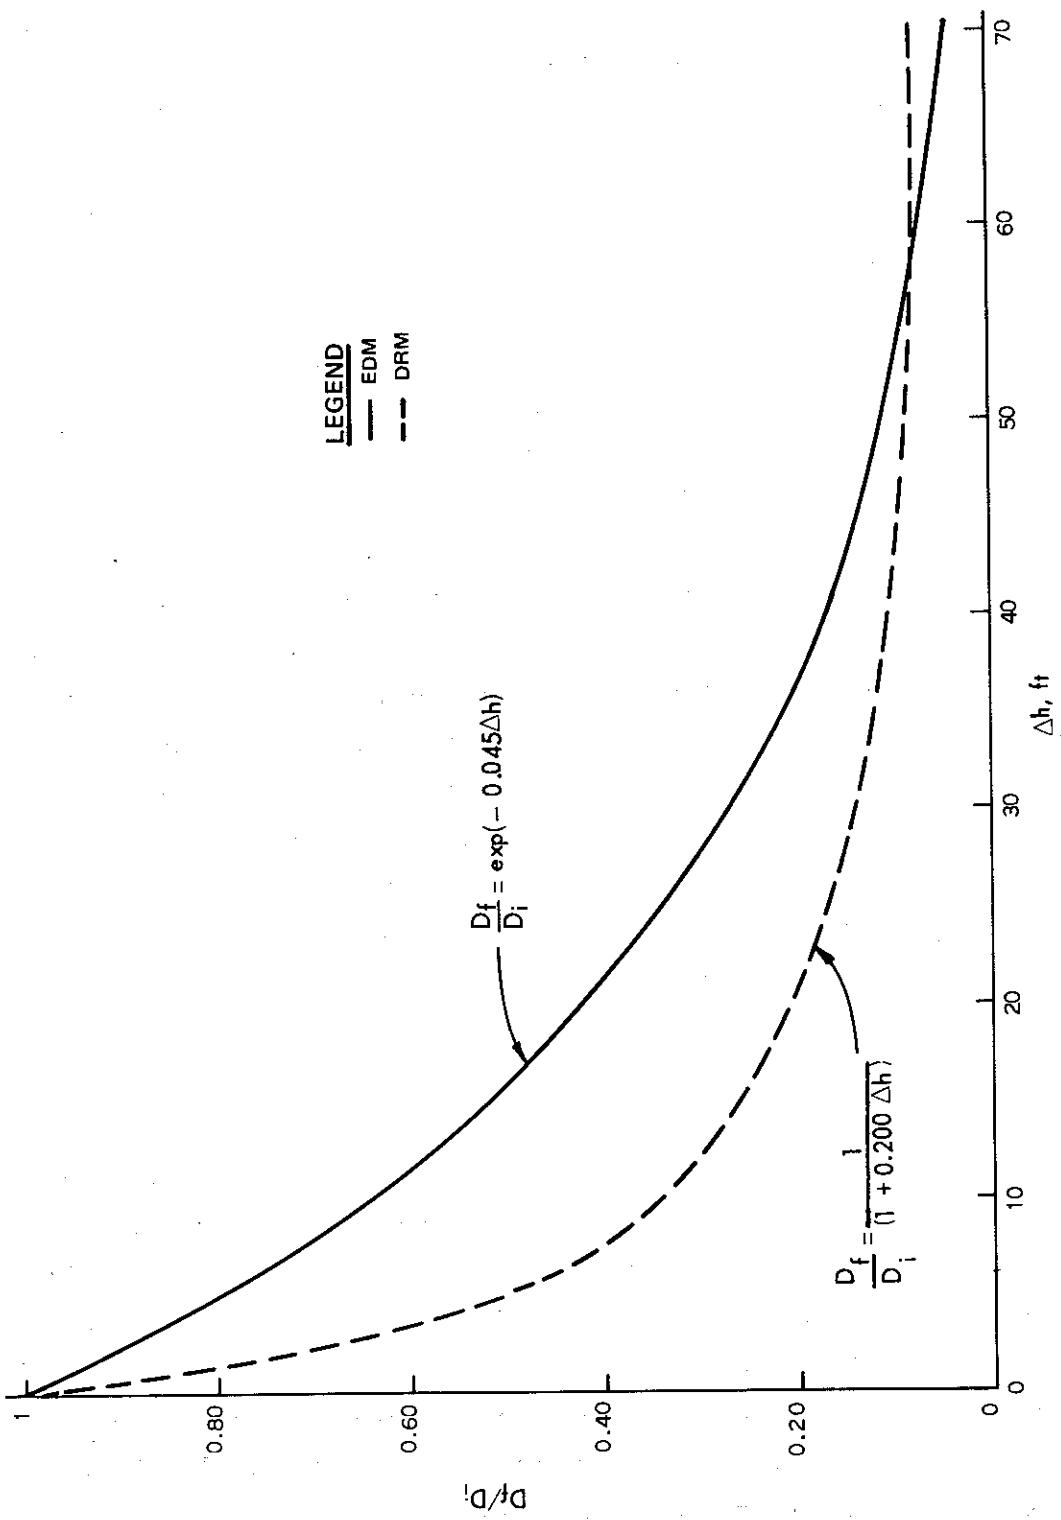


Figure 8. Comparison of DRM and EDM based upon coefficients determined from Enid Outlet Works

26. Additional research should be conducted to evaluate the effects of flow rate on gas transfer. Detailed studies of the hydraulics, turbulence, and energy dissipation related to gas transfer must be performed to clearly identify the cause and effect of structure design and gas exchange. Projects with outlet works similar to the structures examined but with other hydraulic conditions such as submerged outlet portals and full conduit flow should be examined to evaluate gas-transfer characteristics. Since reservoir outlet works are only a portion of the structures used to release water from man-made lakes, other types of structures, such as spillways, sluices, and hydropower structures (Figures 9 and 10), should also be investigated to evaluate appropriate models with these gas-transfer characteristics.

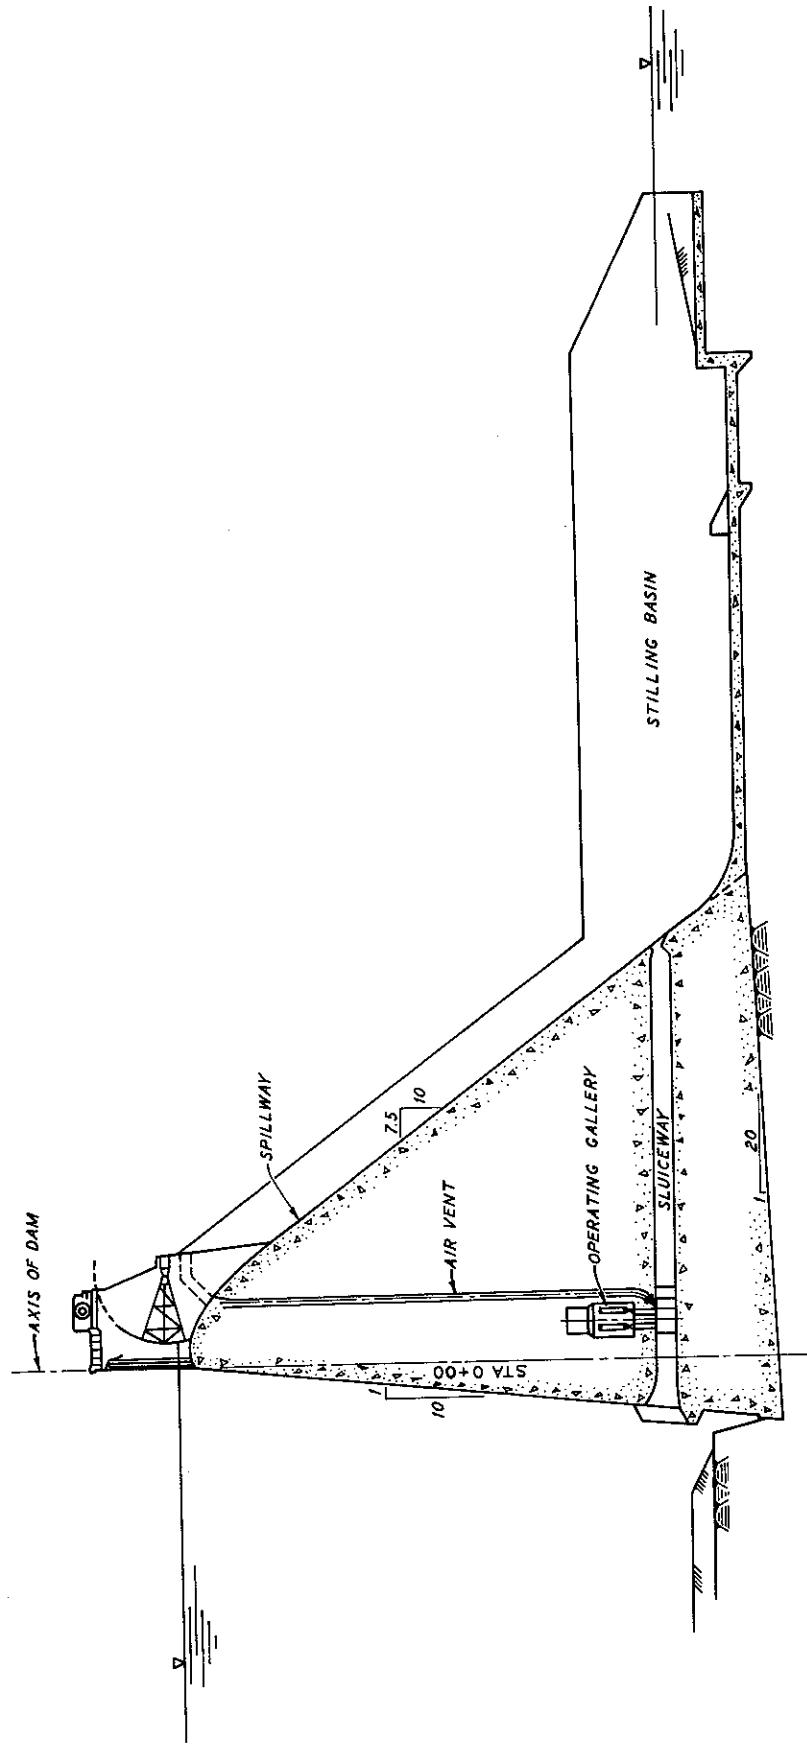


Figure 9. Spillway, sluiceway, and stilling basins


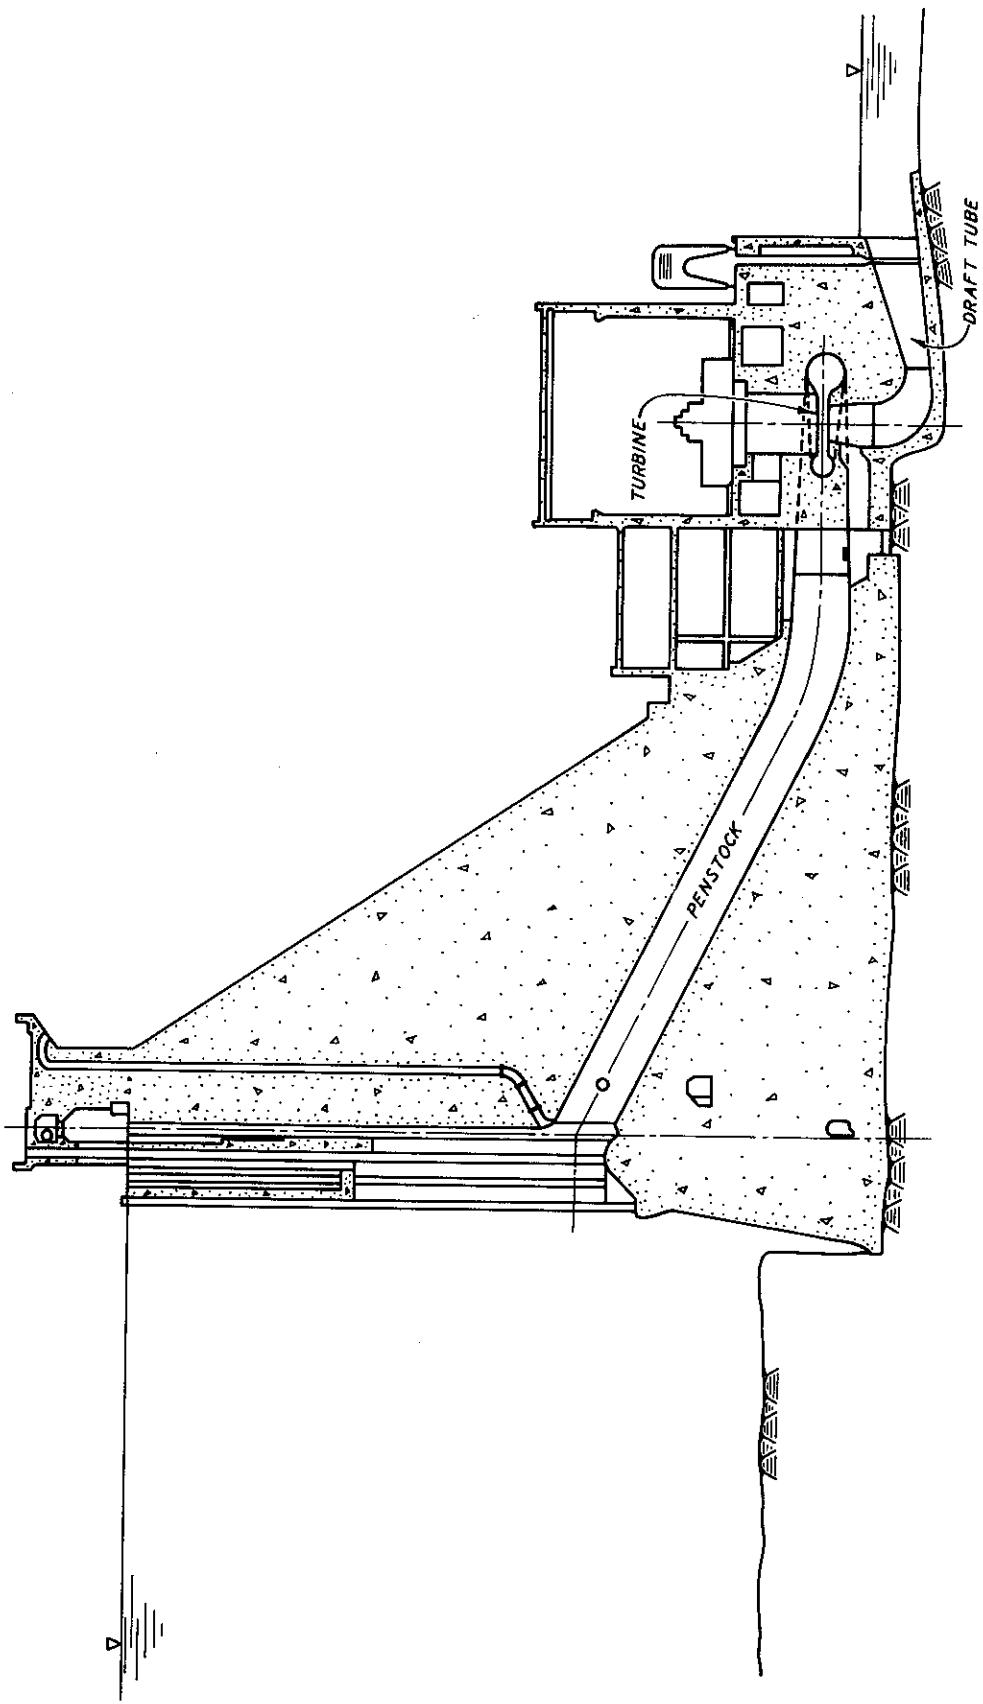


Figure 10. Power house

References

- Bohan, J. P., and Grace, J. L., Jr. 1973. "Selective Withdrawal from Man-Made Lakes; Hydraulics Laboratory Investigation," Technical Report H-73-4, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.
- Hart, E. D., and Wilhelms, S. C. 1977. "Reaeration Tests, Outlet Works, Beltzville Dam, Poco Creek, PA," Technical Report H-77-14, U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.
- Holler, A. G. 1970. "Reaeration of Discharge Through Hydraulic Structures," U. S. Army Engineer Division, Ohio River, Cincinnati, Ohio.
- Loftis, B. (In press). "WESTEX--A Reservoir Simulation Model," U. S. Army Engineer Waterways Experiment Station, CE, Vicksburg, Miss.
- Miller, I., and Freund, J. E. 1977. Probability and Statistics for Engineers, 2d ed., Prentiss-Hall, Englewood Cliffs, N. J.
- Streeter, H. W., and Phelps, E. B. 1925. "A Study of the Pollution and Natural Purification of the Ohio River," U. S. Bulletin 146, Public Health Service.
- Tsivoglou, E. C., et al. 1968. "Tracer Measurement of Stream Reaeration: II. Field Studies," Journal of the Water Pollution Control Federation, Vol 40, No. 2.
- Tsivoglou, E. C., and Neal, L. A. 1976. "Tracer Measurement of Reaeration: III. Predicting the Reaeration Capacity of Inland Streams," Journal of the Water Pollution Control Federation, Vol 48, No. 12.
- Tsivoglou, E. C., and Wallace, J. R. 1972. "Characterization of Stream Reaeration Capacity," EPA-R3-72-012, U. S. Environmental Protection Agency, Washington, D. C.

**ARKABUTLA DAM  
OUTLET STRUCTURE**

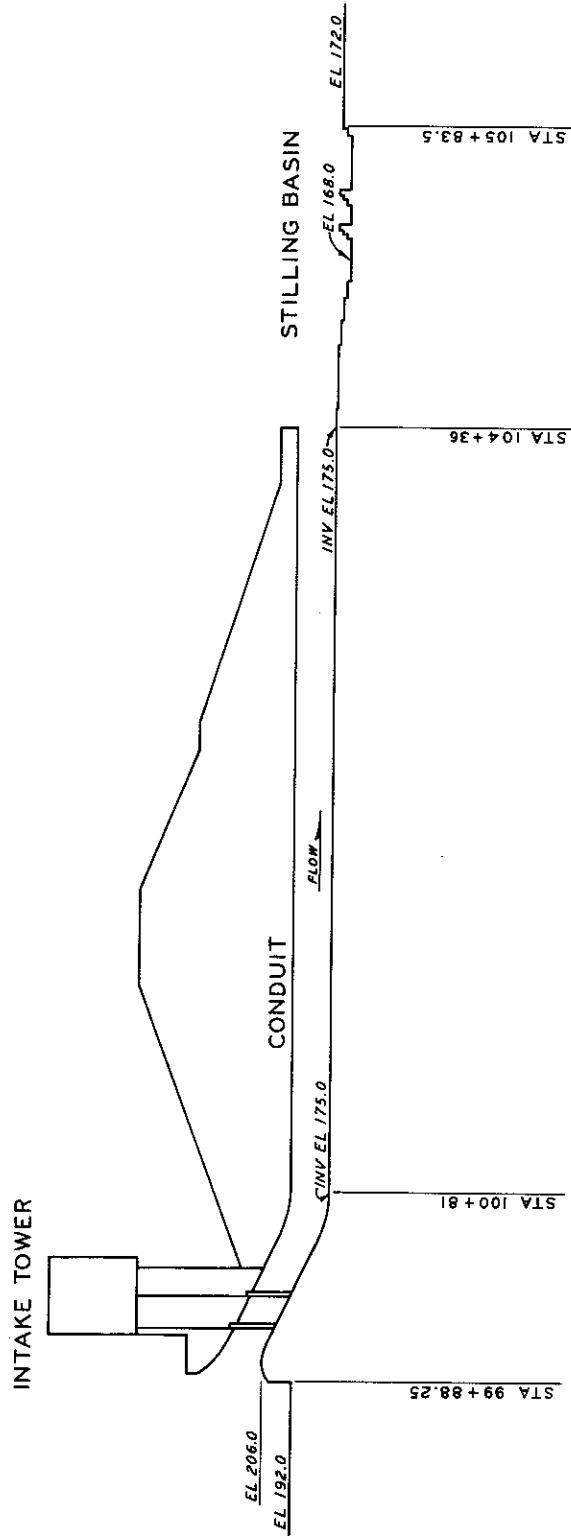

BELTZVILLE DAM  
OUTLET STRUCTURE

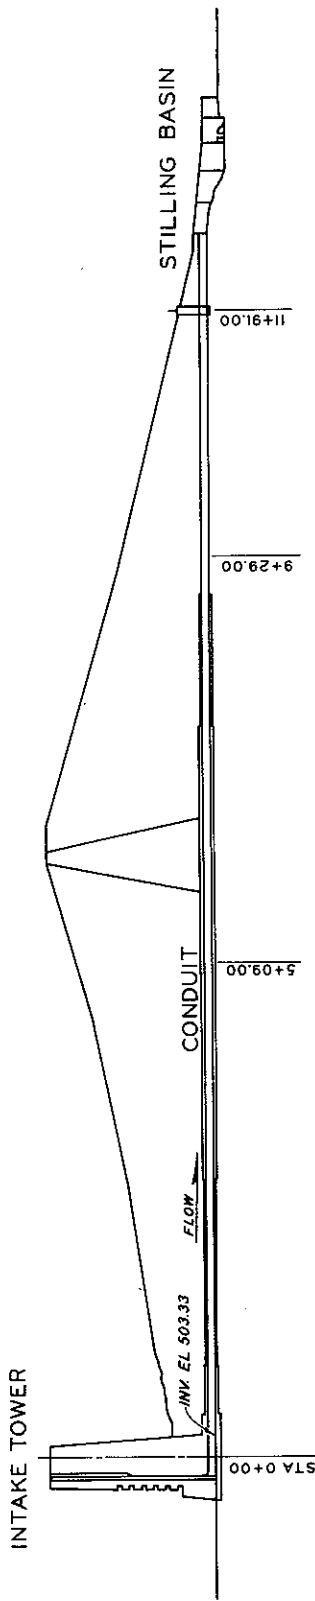


PLATE 2

C. J. BROWN DAM  
OUTLET STRUCTURE

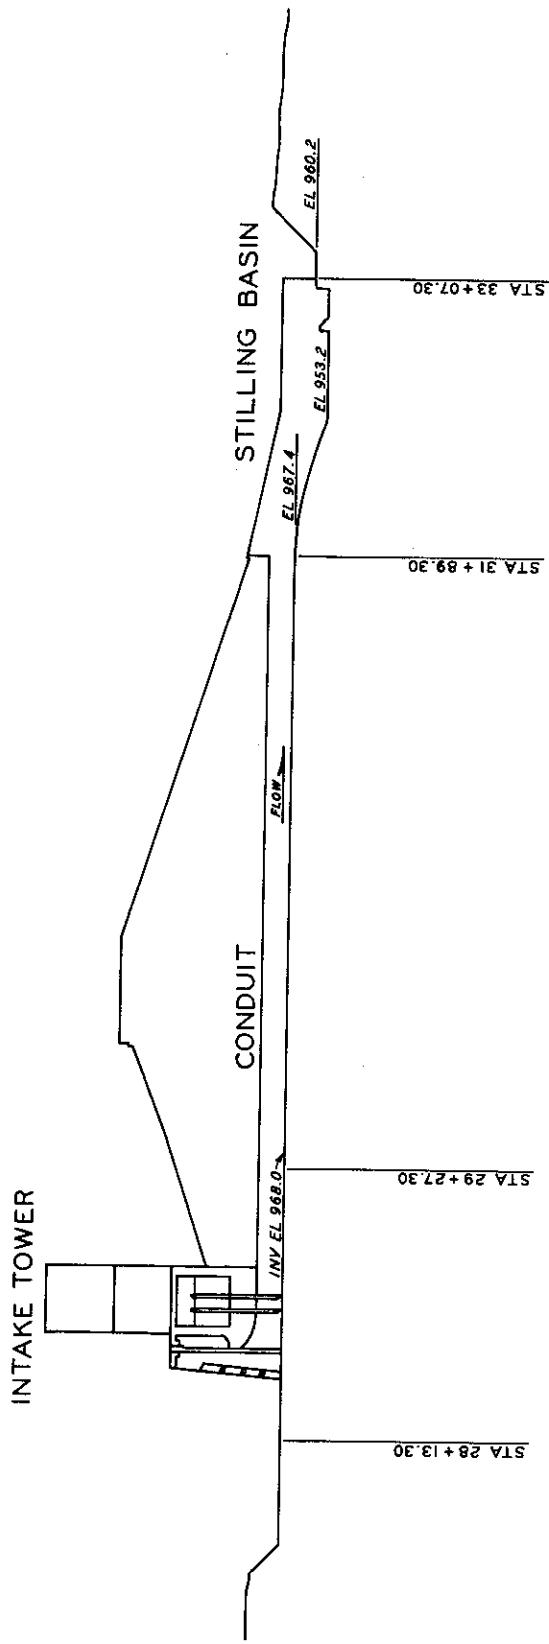


PLATE 3

CRIPPLE CREEK DAM  
OUTLET STRUCTURE

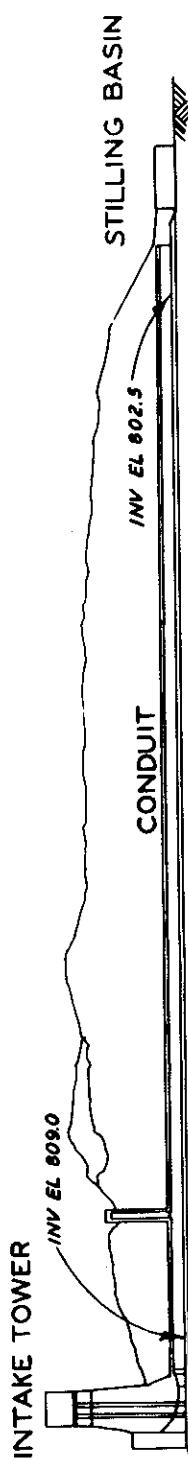


PLATE 4

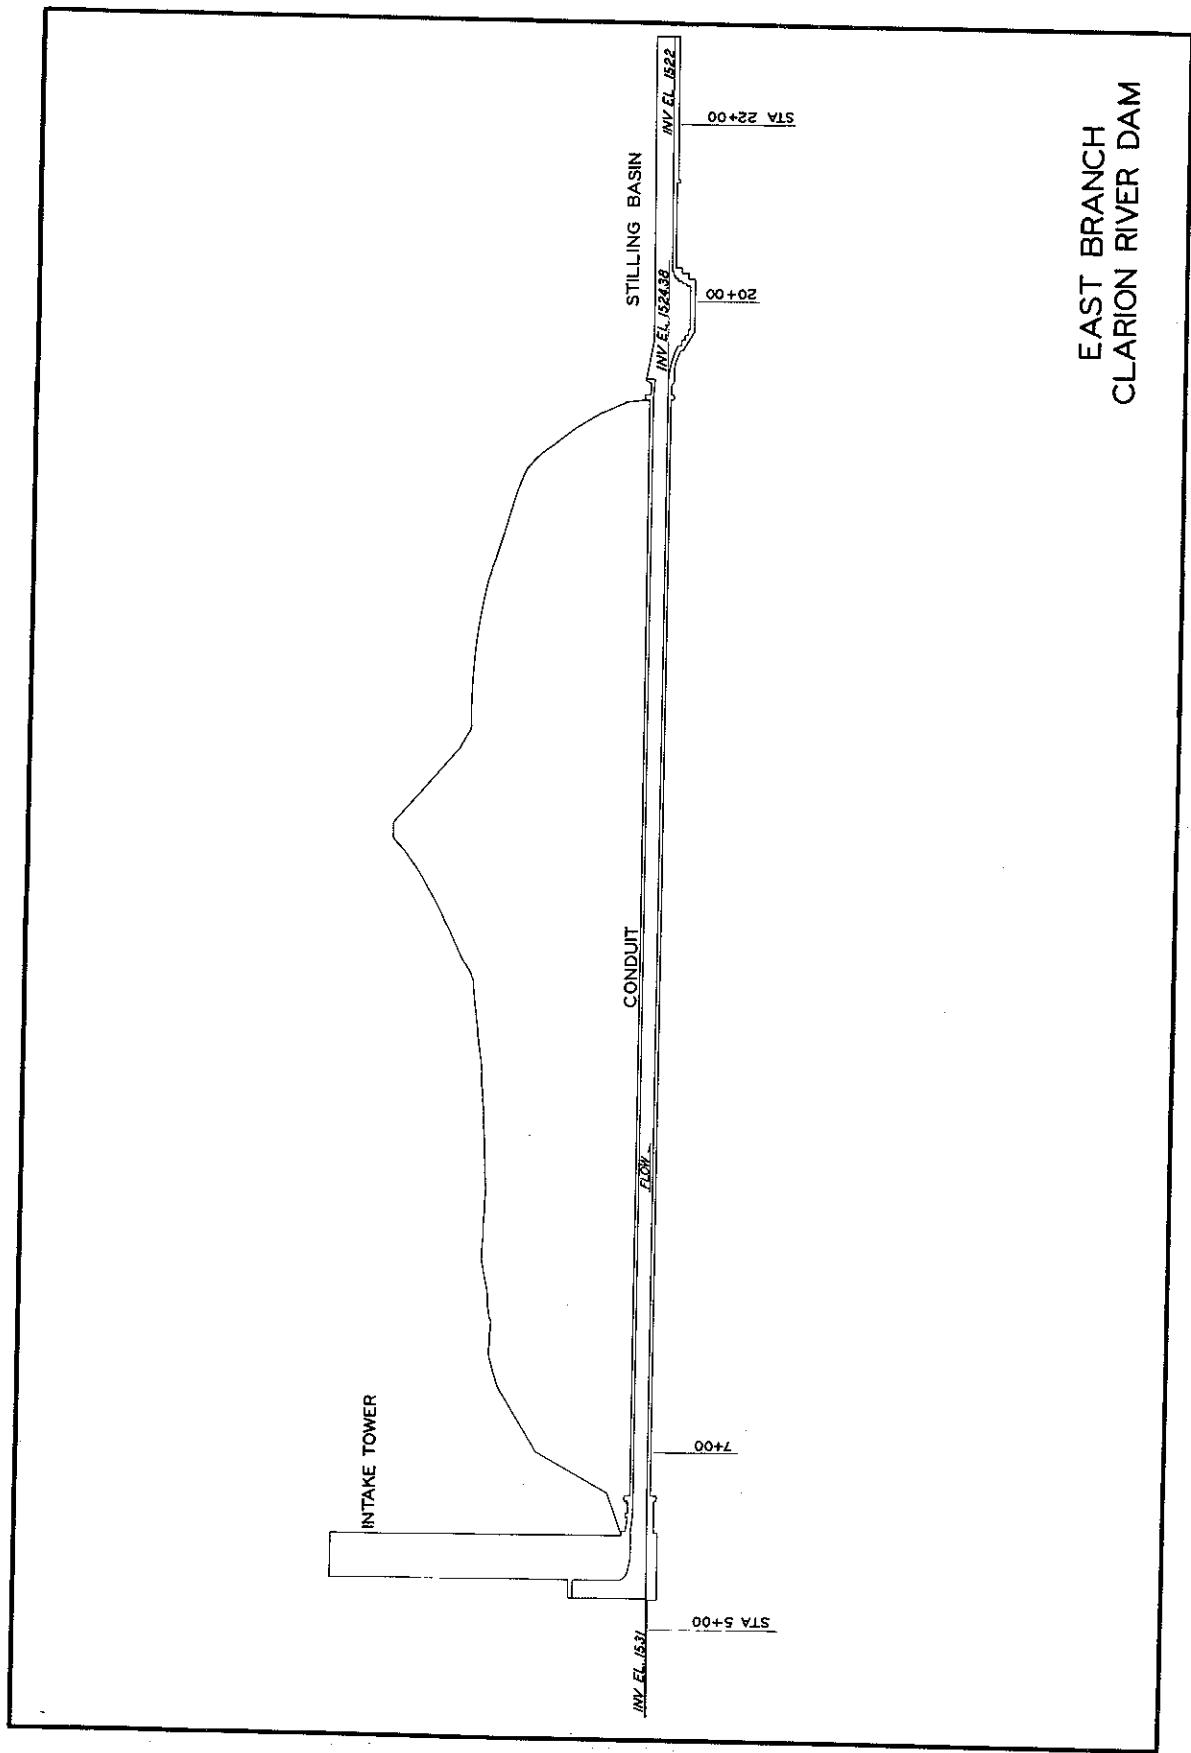
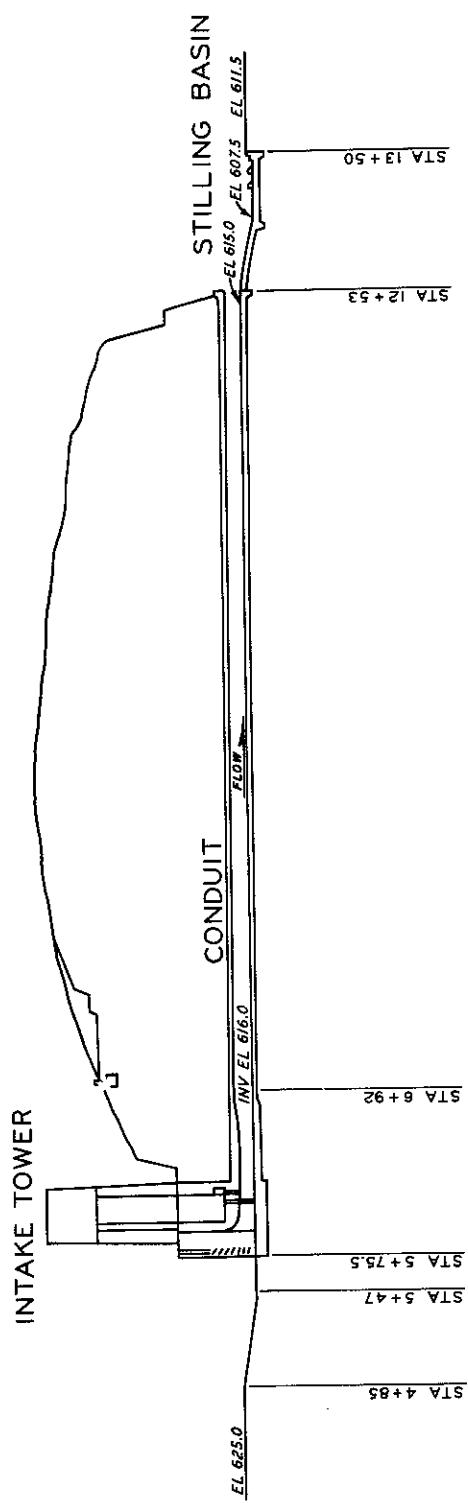


PLATE 5

EAST LYNN DAM  
OUTLET STRUCTURE



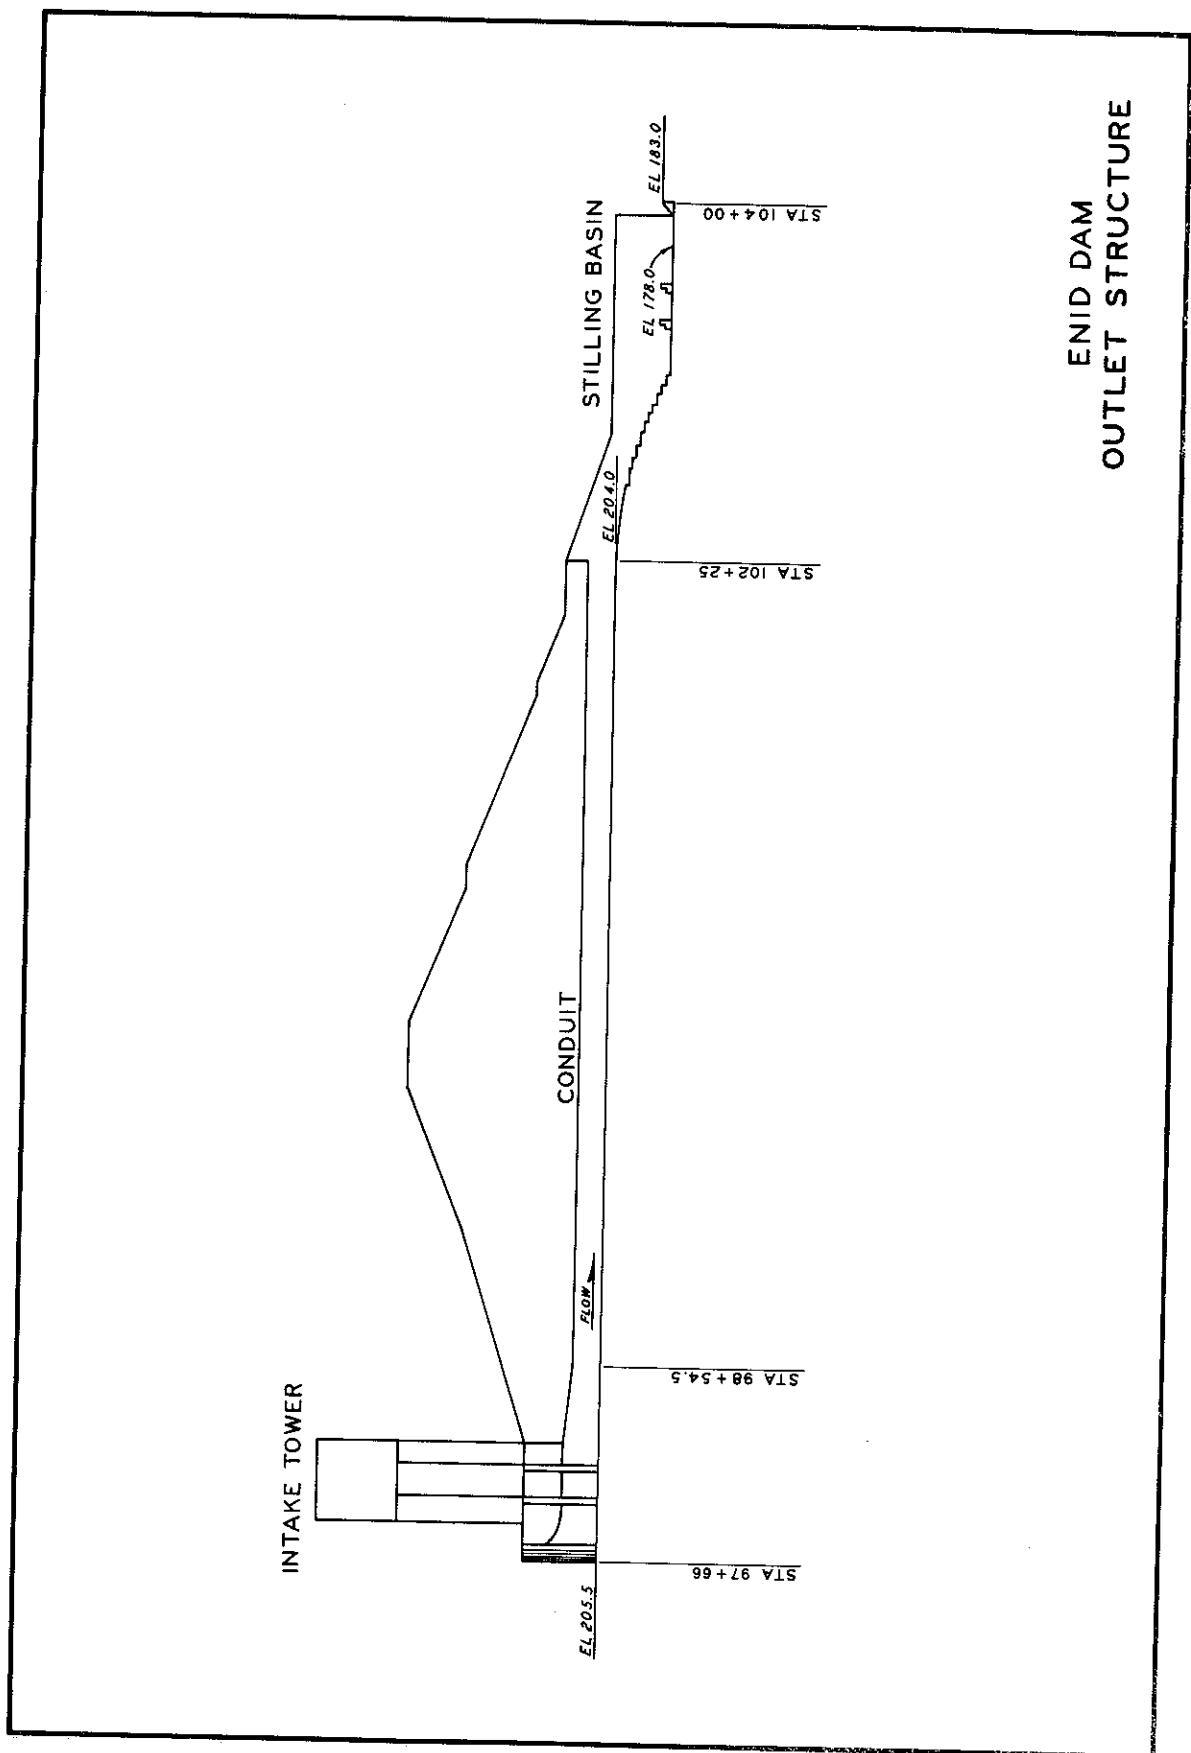


PLATE 7

**GRAYSON DAM  
OUTLET STRUCTURE**


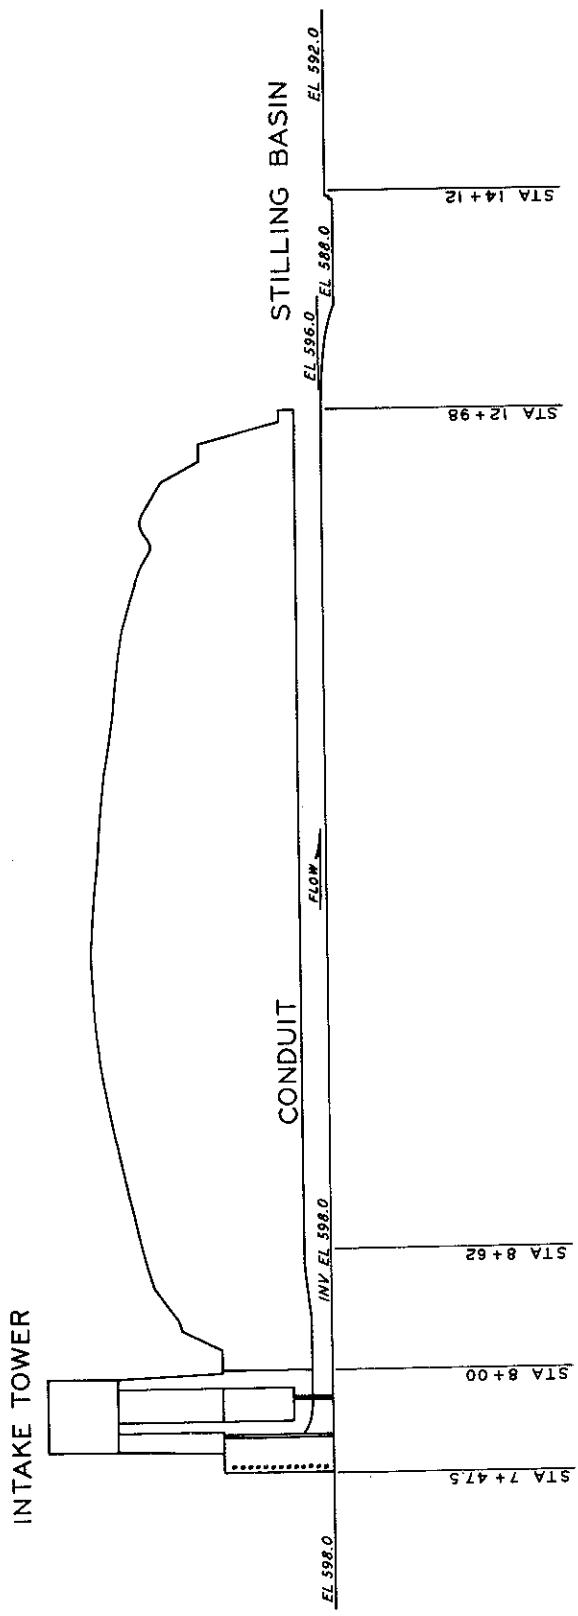


PLATE 8

GRENADA DAM  
OUTLET STRUCTURE

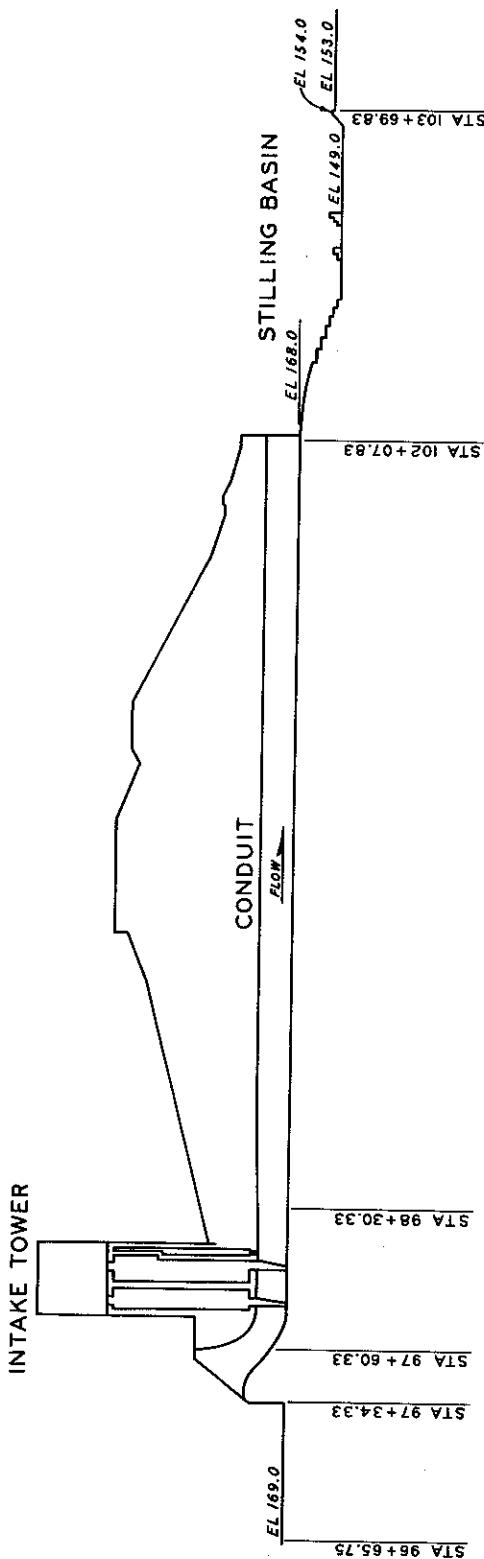

**MISSISSINewA DAM  
OUTLET STRUCTURE**

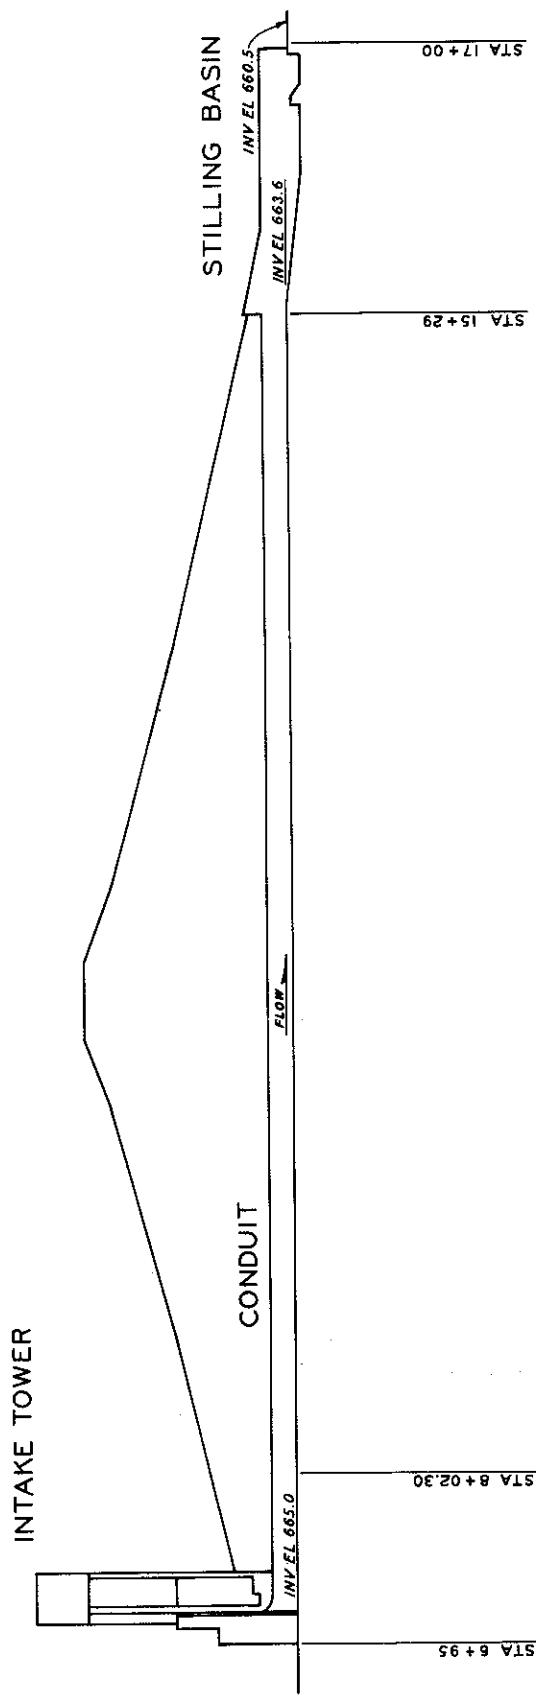


PLATE 10

SALAMONIE DAM  
OUTLET STRUCTURE

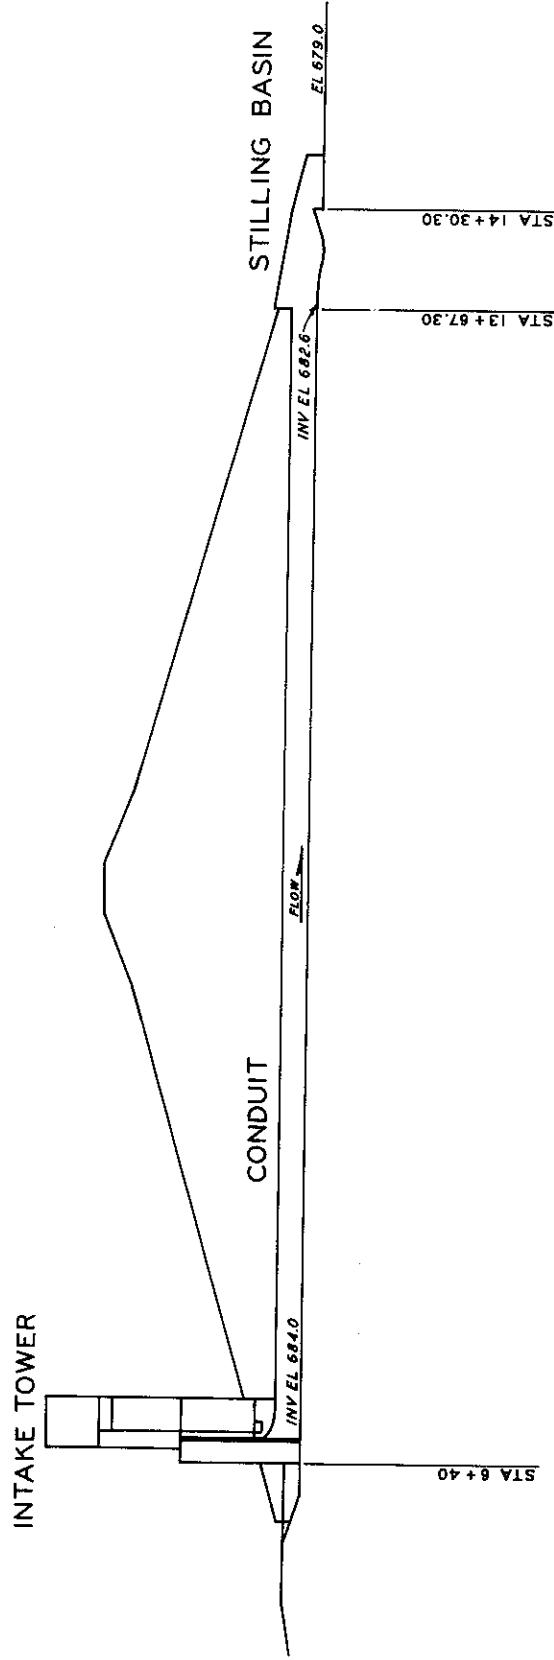


PLATE 11

SARDIS DAM  
OUTLET STRUCTURE


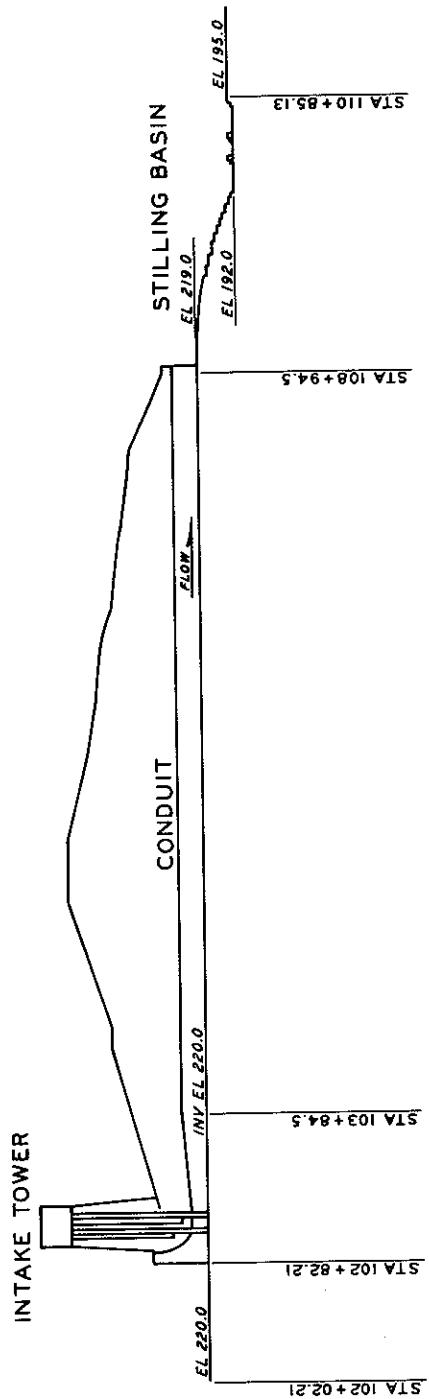


PLATE 12

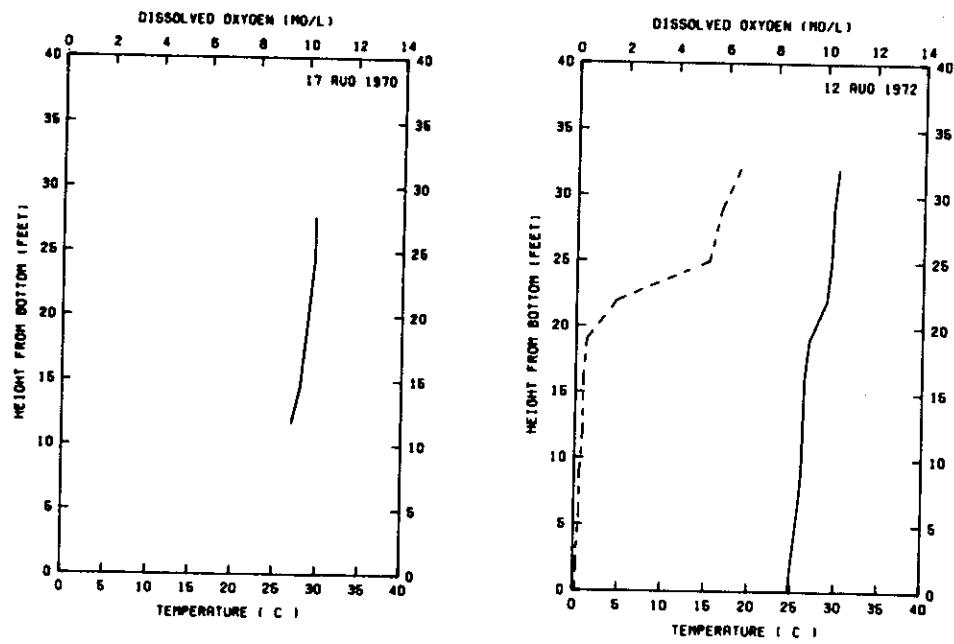

**LEGEND**


— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

ARKABUTLA LAKE


**TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES**

17 AUG 1970-12 AUG 1972


PLATE 13

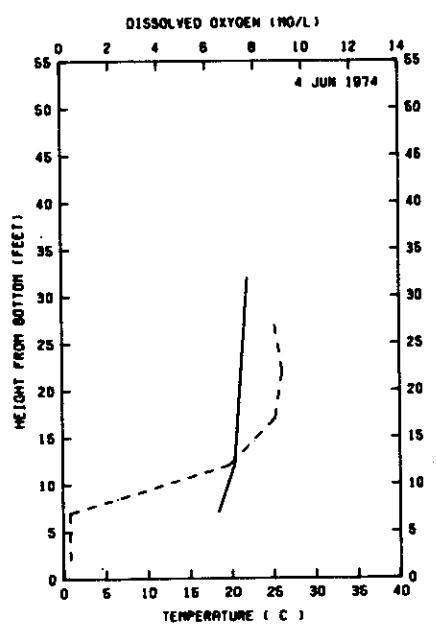


RELEASE TEMP. 20.8  
RELEASE D.O. 7.8

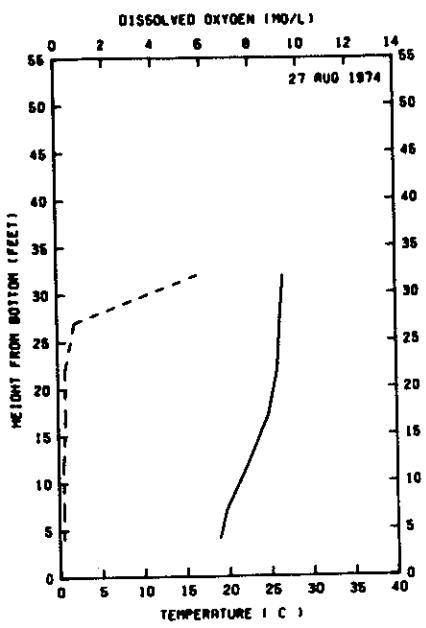

RELEASE TEMP. 21.7  
RELEASE D.O. 10.4

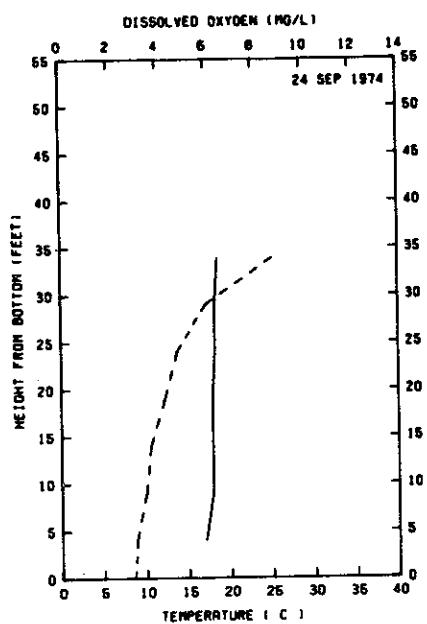

RELEASE TEMP. NA  
RELEASE D.O. 10.4

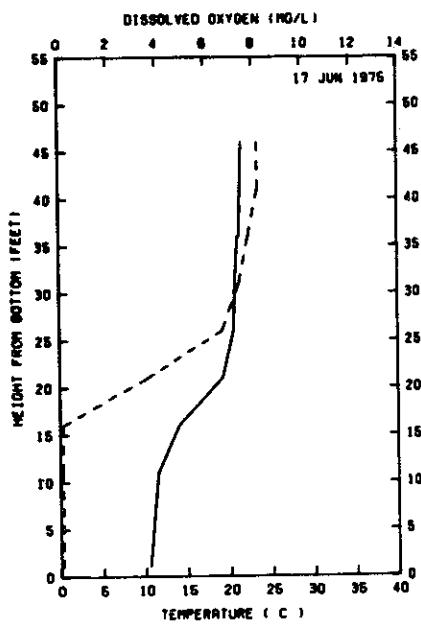


RELEASE TEMP. 15.6  
RELEASE D.O. 9.4

#### LEGEND


- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

#### C. J. BROWN LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

4 JUN 1974-17 JUN 1975

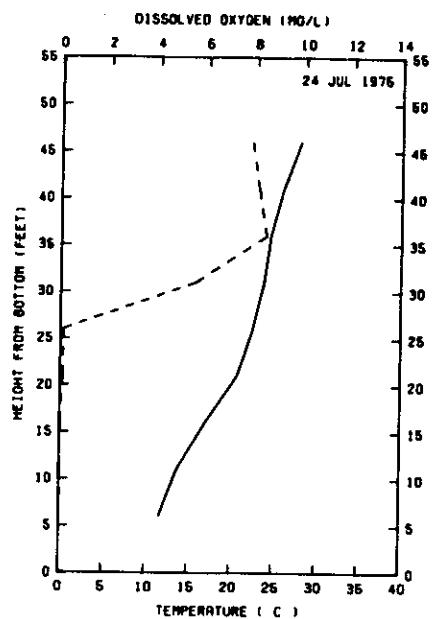

RELEASE TEMP. 22.6  
RELEASE D.O. 7.8

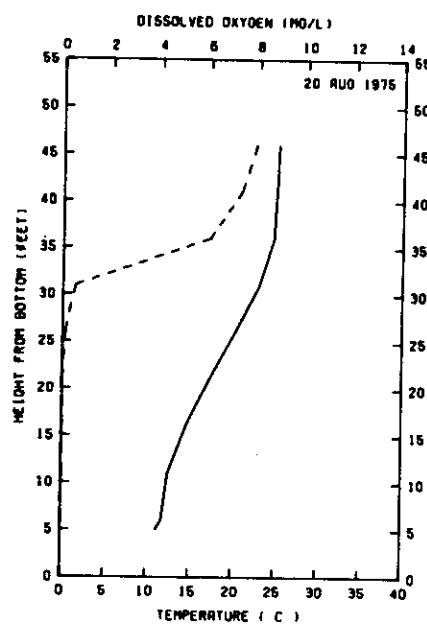

RELEASE TEMP. 25.5  
RELEASE D.O. 7.6




#### LEGEND

- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

#### C. J. BROWN LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

24 JUL 1975-20 AUG 1975

PLATE 15


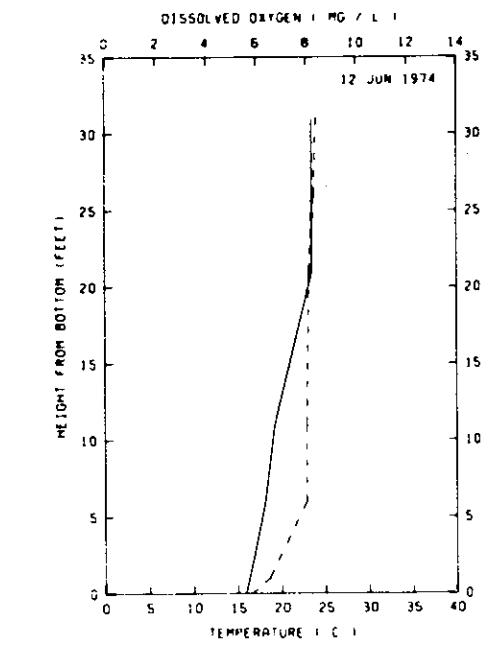
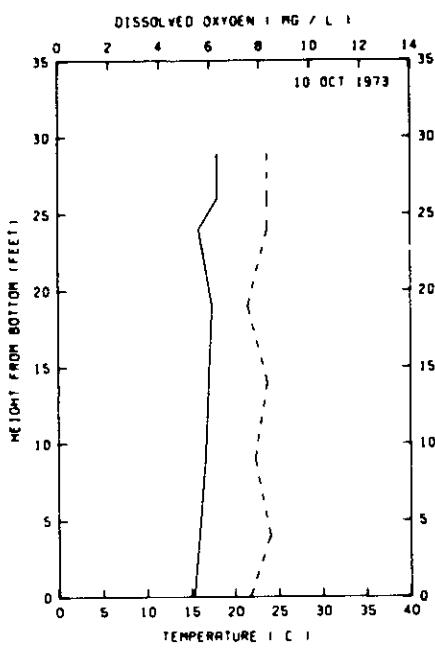
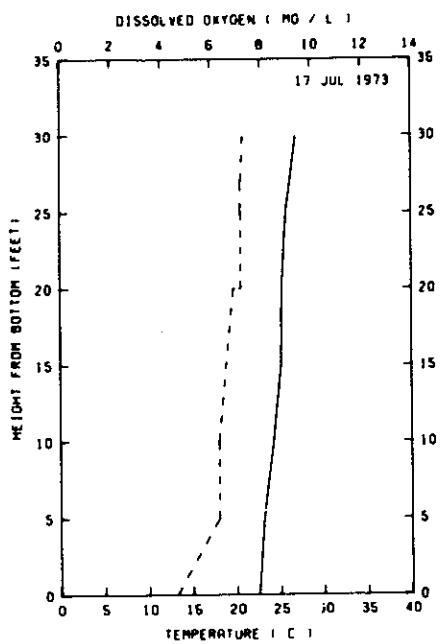


LEGEND

— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

CROOKED CREEK LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES

17 JUL 1973-12 JUN 1974

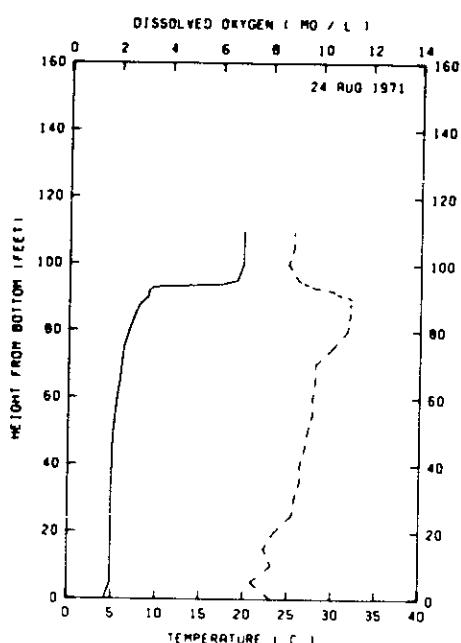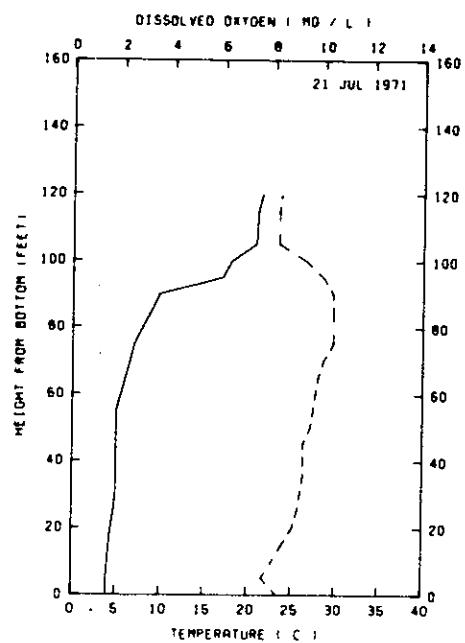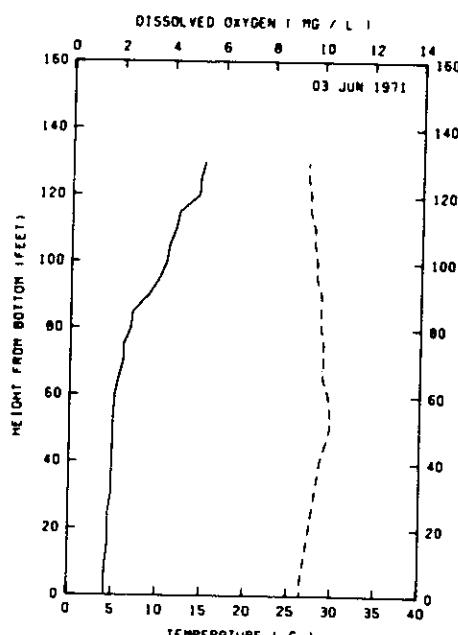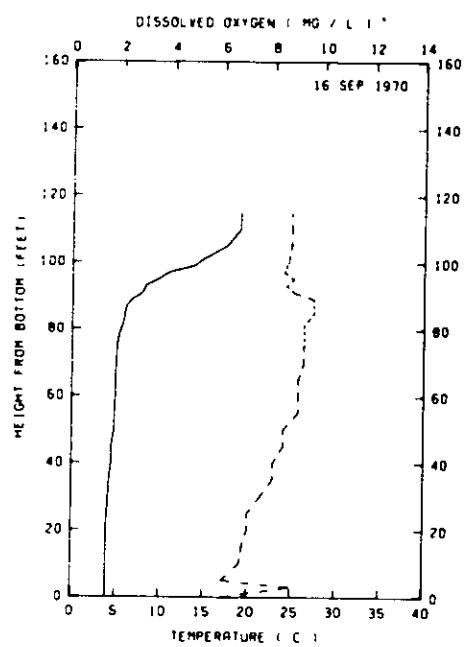


LEGEND


— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

EAST BRANCH LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES


16 SEP 1970-24 AUG 1971

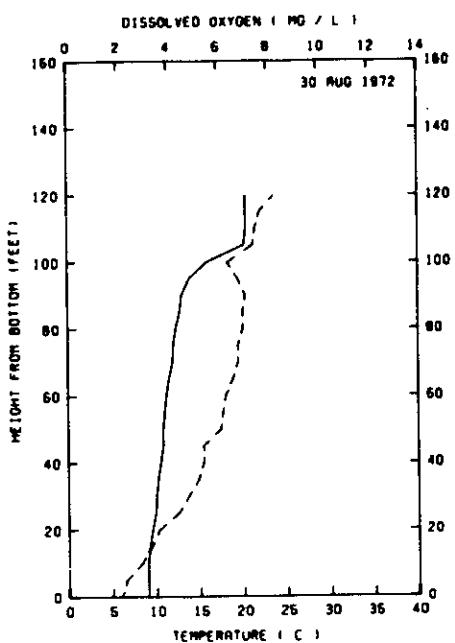


RELEASE TEMP. 19.2  
RELEASE D.O. 8.9

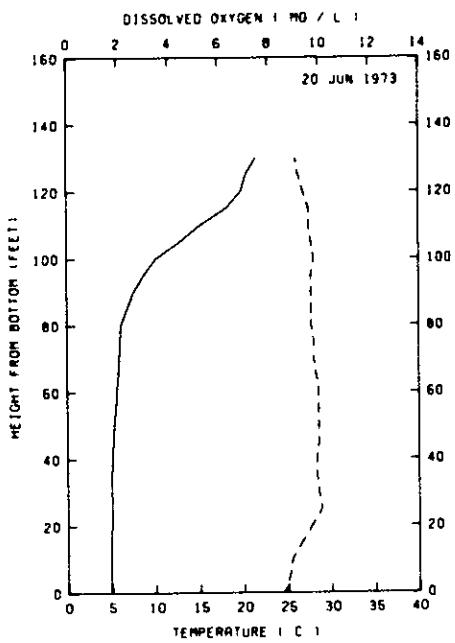

RELEASE TEMP. 13.6  
RELEASE D.O. 9.4

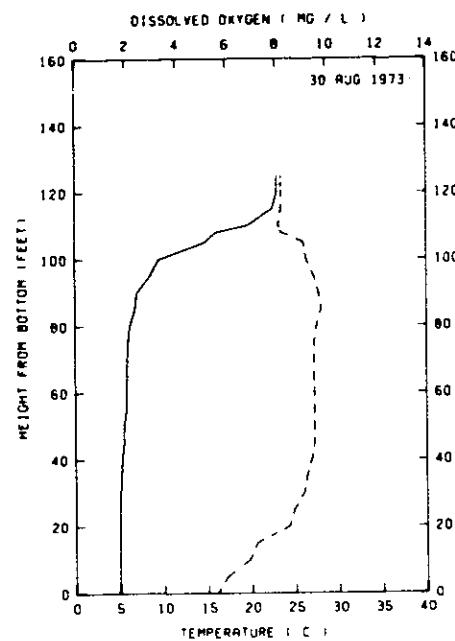

RELEASE TEMP. 21.0  
RELEASE D.O. 8.4

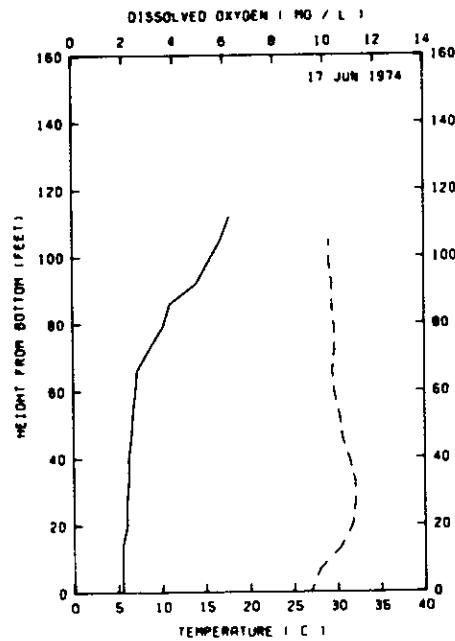


RELEASE TEMP. 14.3  
RELEASE D.O. 9.6

#### LEGEND


- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

#### EAST BRANCH LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES


30 AUG 1972-17 JUN 1974

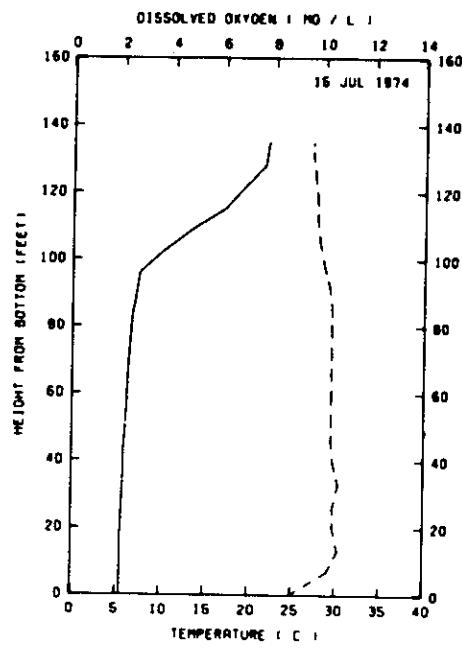

RELEASE TEMP. 20.0  
RELEASE D.O. 9.1

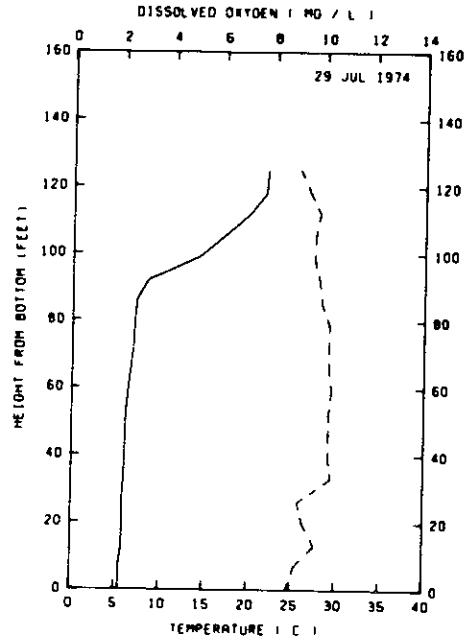

RELEASE TEMP. 19.0  
RELEASE D.O. 9.0

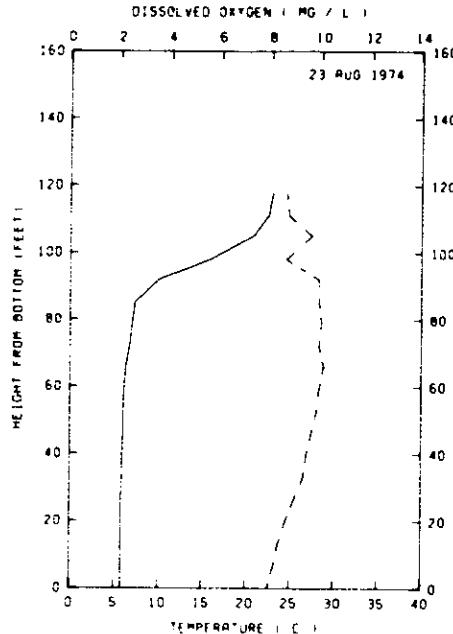

RELEASE TEMP. 22.3  
RELEASE D.O. 9.1


#### LEGEND

- WATER TEMPERATURE
- - - DISSOLVED OXYGEN


#### EAST BRANCH LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

15 JUL 1974-23 AUG 1974


PLATE 19

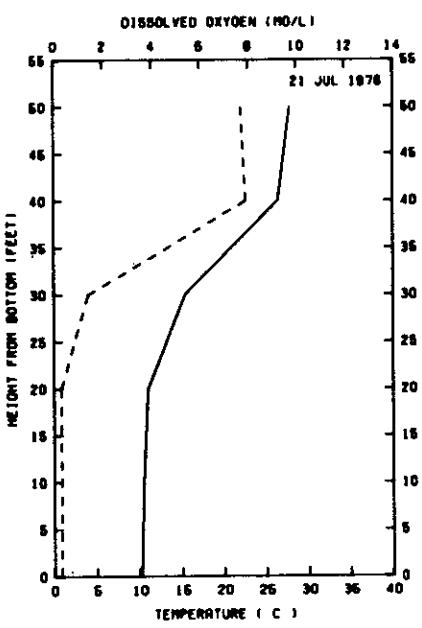

RELEASE TEMP. 23.2  
RELEASE D.O. 7.8

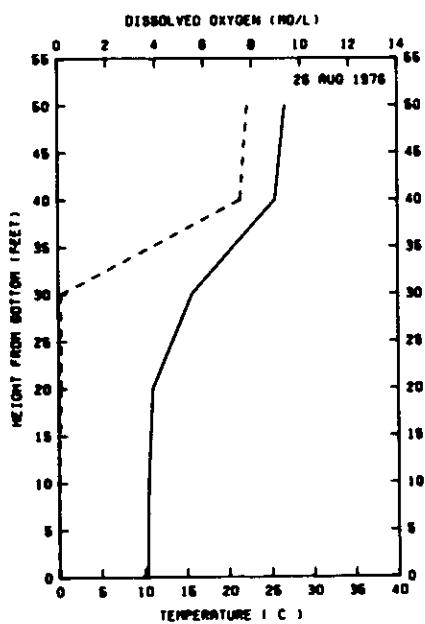

RELEASE TEMP. 22.5  
RELEASE D.O. 7.8

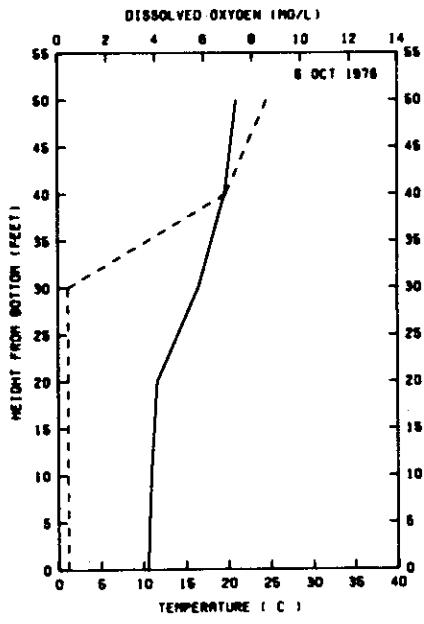


RELEASE TEMP. 19.3  
RELEASE D.O. 8.7


#### LEGEND

- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

EAST LYNN LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES  
21 JUL 1976-6 OCT 1976

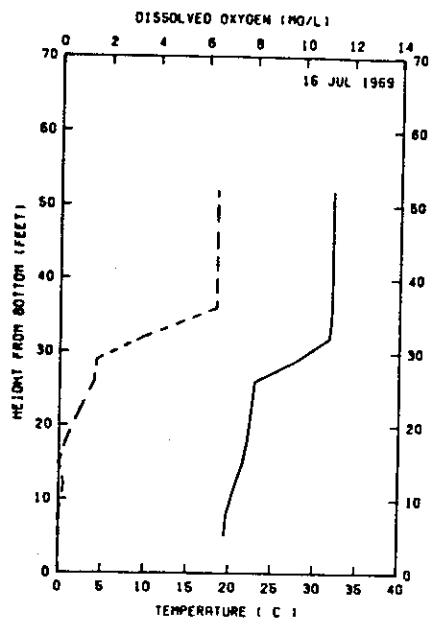

RELEASE TEMP. 24.1  
RELEASE D.O. 7.9

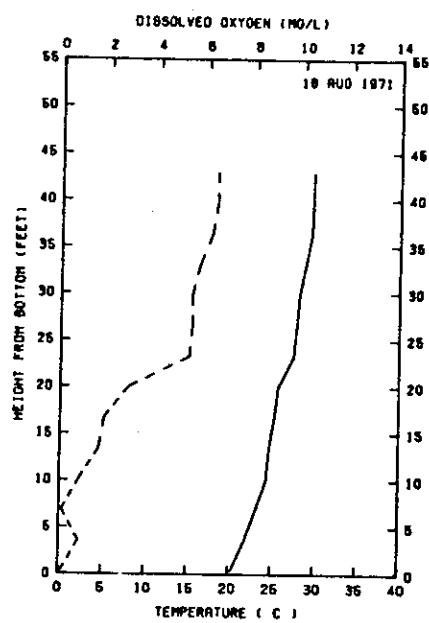

RELEASE TEMP. 25.7  
RELEASE D.O. 6.8


#### LEGEND

- WATER TEMPERATURE
- - - DISSOLVED OXYGEN


#### ENID LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

16 JUL 1969-18 AUG 1971


PLATE 21

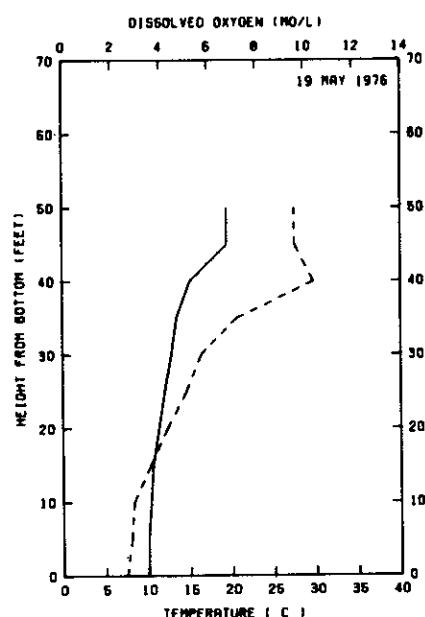

RELEASE TEMP. 17.0  
RELEASE D.O. 9.5

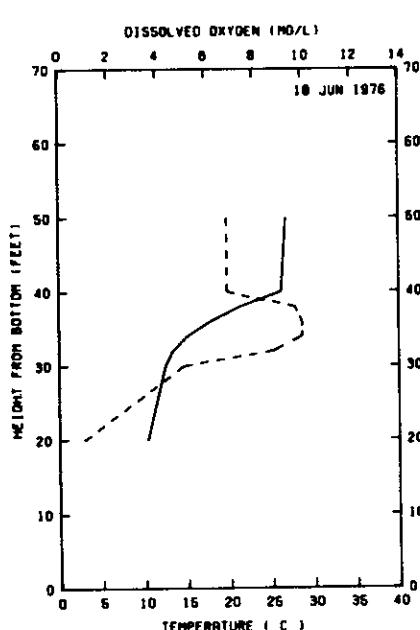

RELEASE TEMP. 21.8  
RELEASE D.O. 8.4

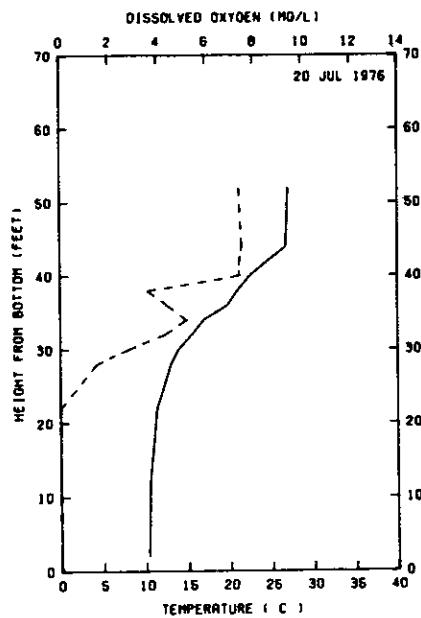


RELEASE TEMP. 22.4  
RELEASE D.O. 8.0

#### LEGEND


- WATER TEMPERATURE
- - DISSOLVED OXYGEN

#### GRAYSON LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

19 MAY 1976-20 JUL 1976

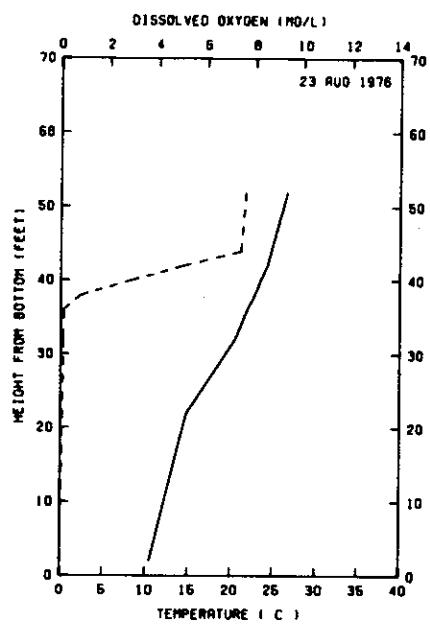

RELEASE TEMP. 20.0  
RELEASE D.O. 7.9

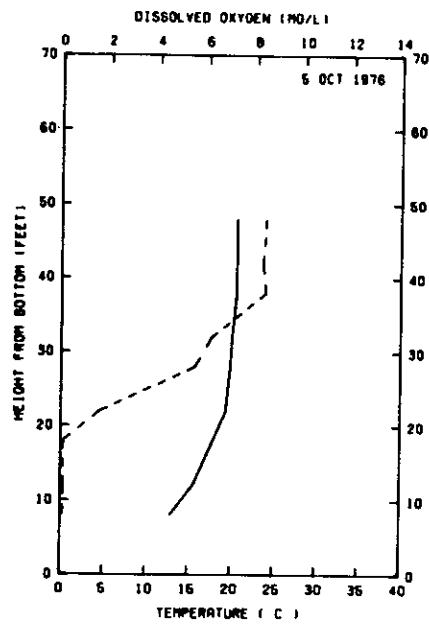

RELEASE TEMP. 18.4  
RELEASE D.O. 8.6

LEGEND


- WATER TEMPERATURE
- DISSOLVED OXYGEN

GRAYSON LAKE


**TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES**

23 AUG 1976-5 OCT 1976


PLATE 23

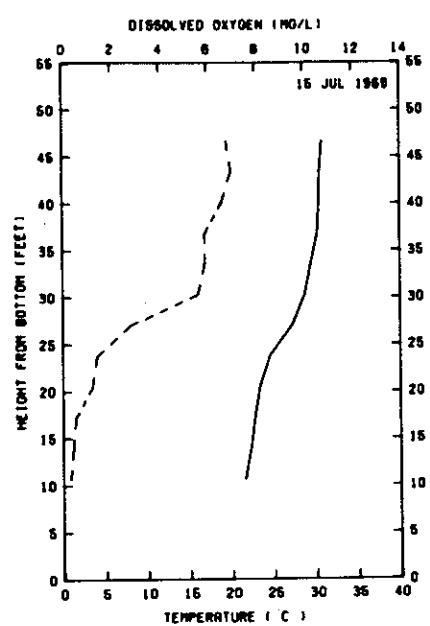


RELEASE TEMP. 28.2  
RELEASE D.O. 7.7

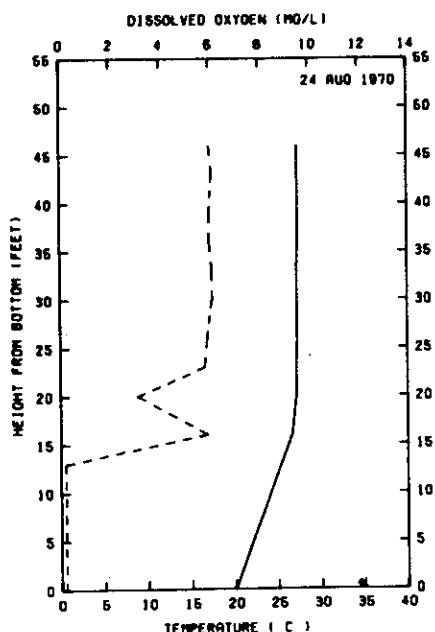

RELEASE TEMP. 26.3  
RELEASE D.O. 7.6

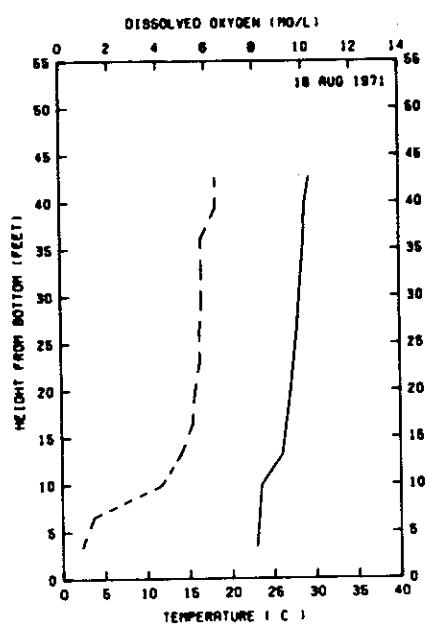

RELEASE TEMP. 27.9  
RELEASE D.O. 6.8

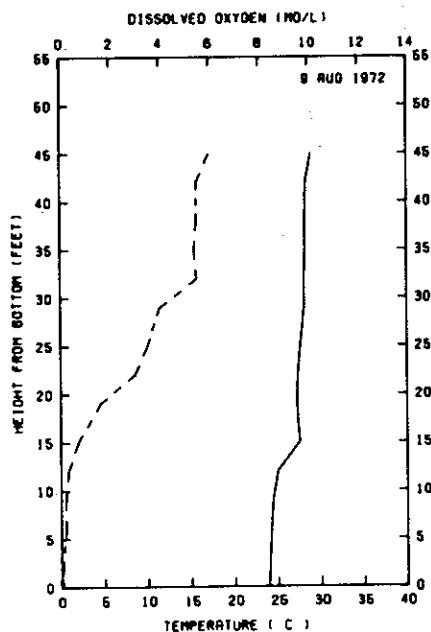





RELEASE TEMP. 27.6  
RELEASE D.O. 6.9

#### LEGEND

- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

#### GRENADA LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

15 JUL 1969-9 AUG 1972

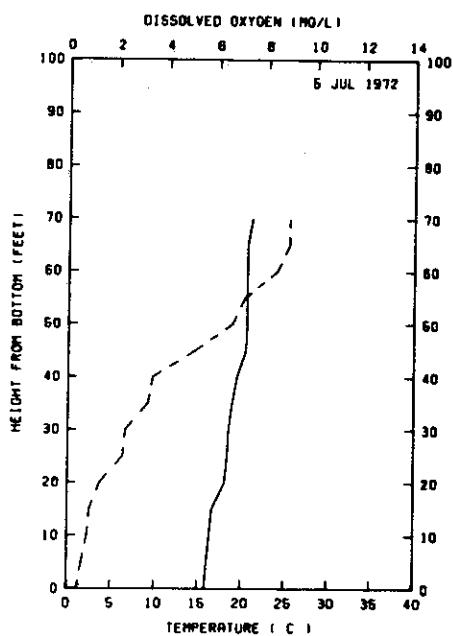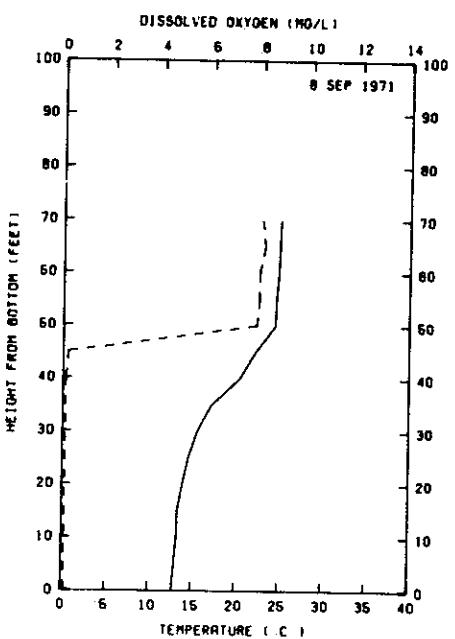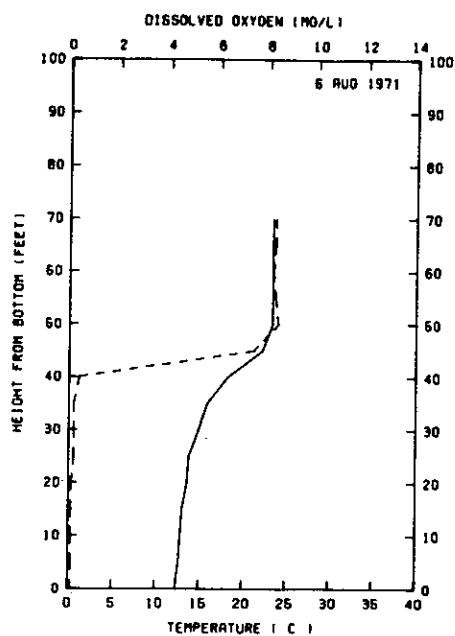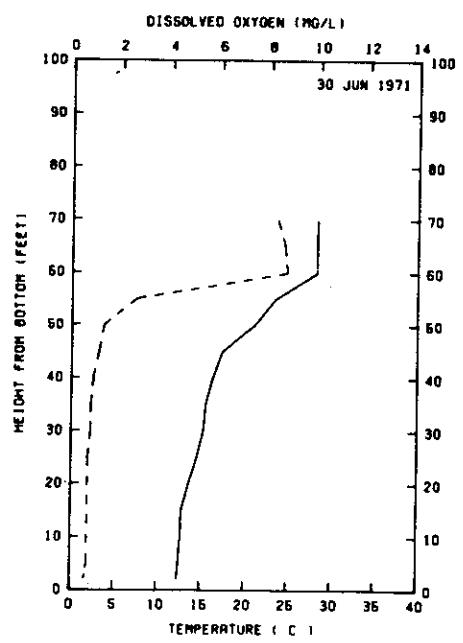

#### LEGEND




— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

MISSISSINEWA LAKE

#### TEMPERATURE AND DISSOLVED OXYGEN PROFILES

30 JUN 1971-5 JUL 1972

PLATE 25

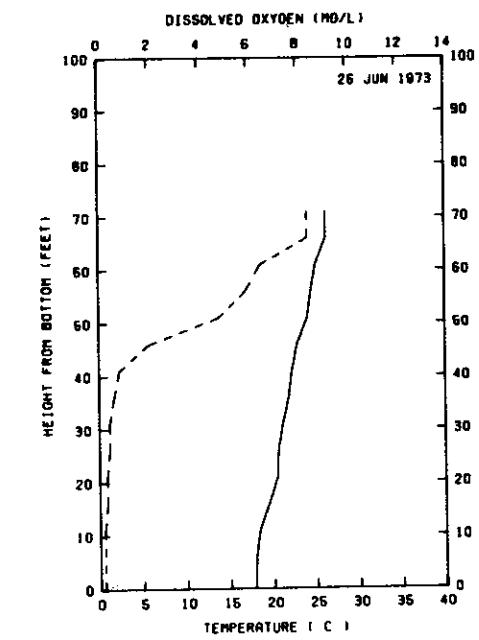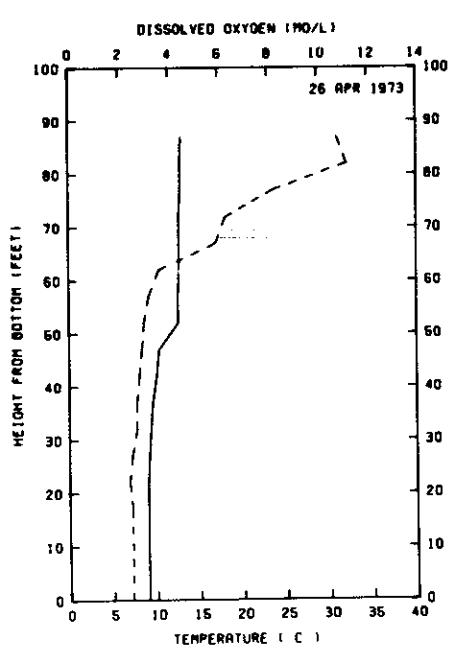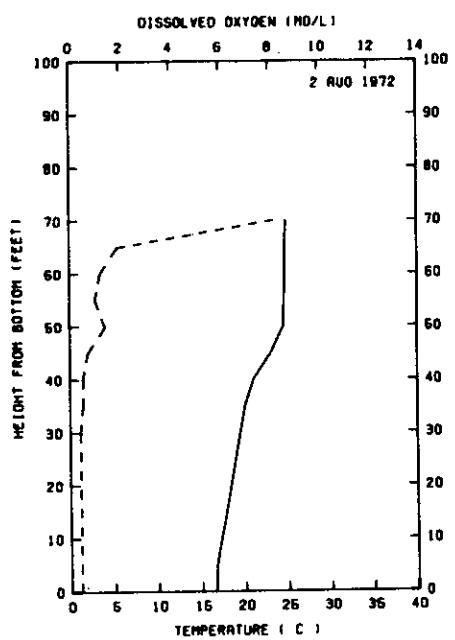


LEGEND


— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

MISSISSINewA LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES


2 AUG 1972-26 JUN 1973

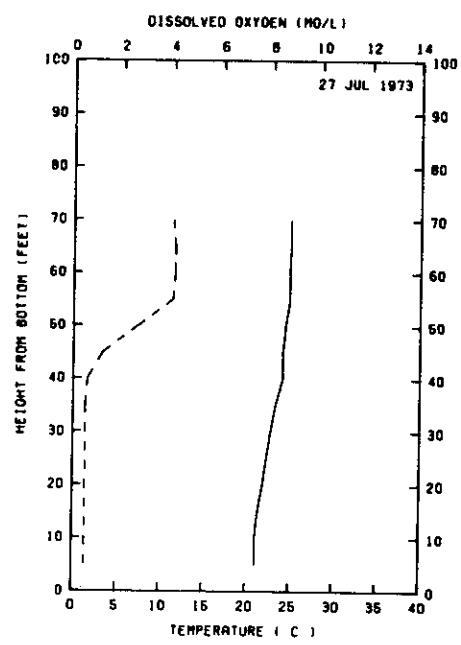


RELEASE TEMP. 23.6  
RELEASE D.O. 8.2

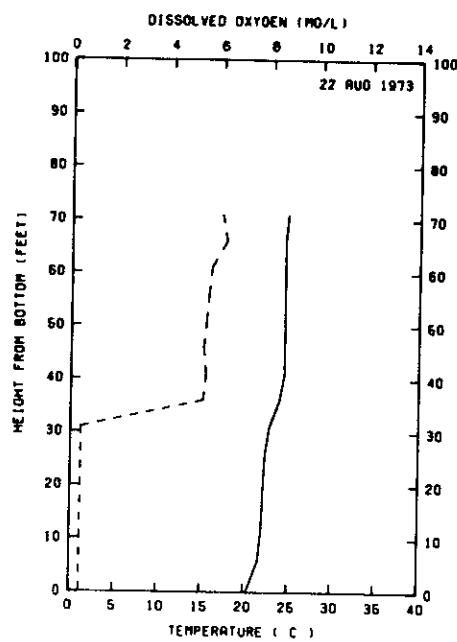

RELEASE TEMP. 23.3  
RELEASE D.O. 8.8

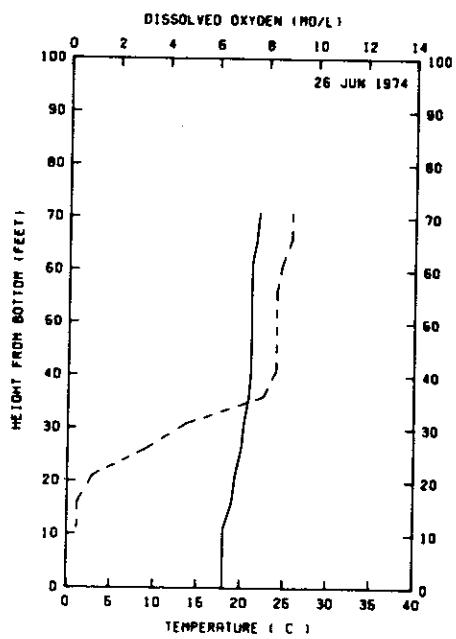

RELEASE TEMP. 19.7  
RELEASE D.O. 9.6

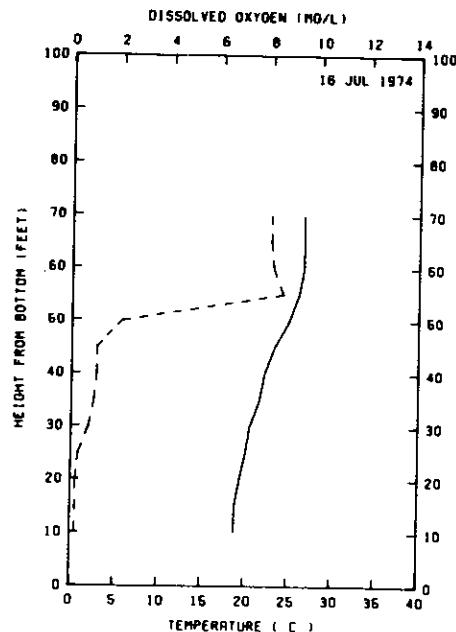

RELEASE TEMP. 25.8  
RELEASE D.O. 8.7


#### LEGEND

- WATER TEMPERATURE
- DISSOLVED OXYGEN


MISSISSINNEWA LAKE

#### TEMPERATURE AND DISSOLVED OXYGEN PROFILES


27 JUL 1973-16 JUL 1974

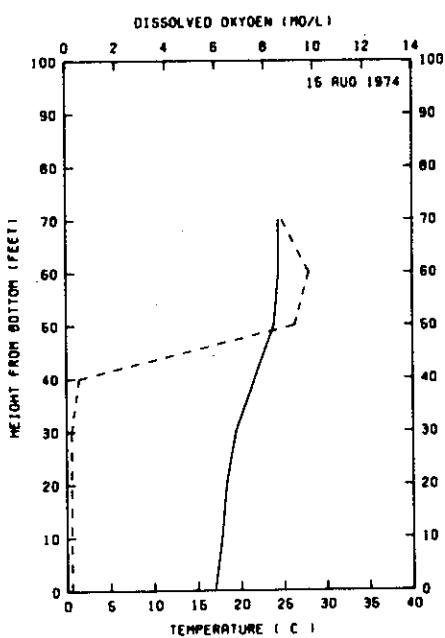

RELEASE TEMP. 24.4  
RELEASE D.O. 9.4

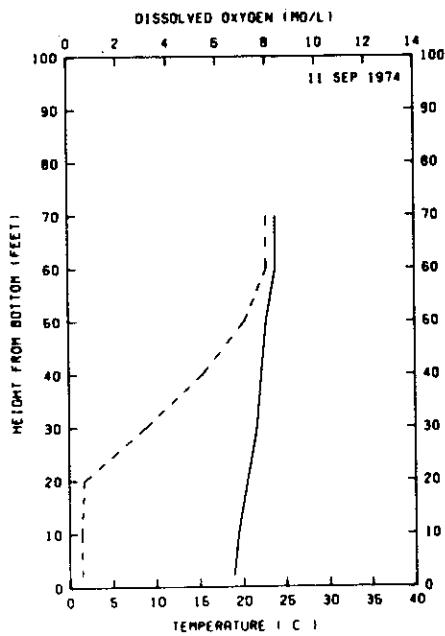

RELEASE TEMP. NA  
RELEASE D.O. 8.8

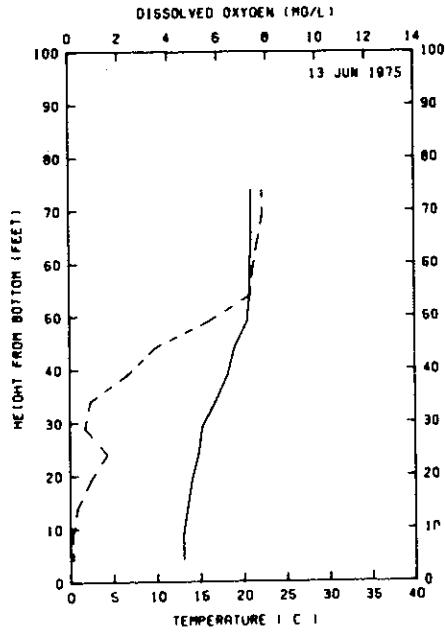


RELEASE TEMP. 19.4  
RELEASE D.O. 7.8


LEGEND  
— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

MISSISSINewA LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES


15 AUG 1974-13 JUN 1975

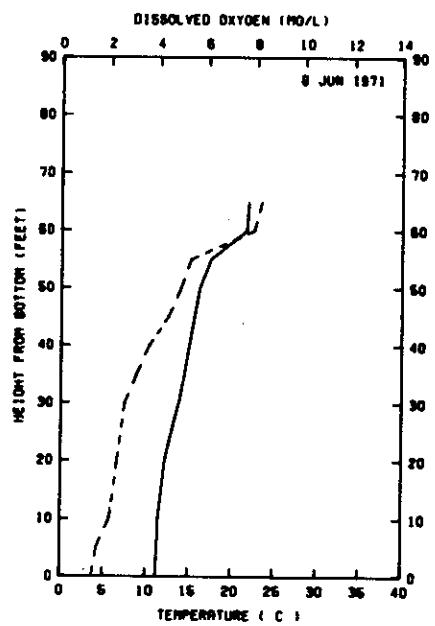


RELEASE TEMP. 17.2  
RELEASE D.O. 11.0

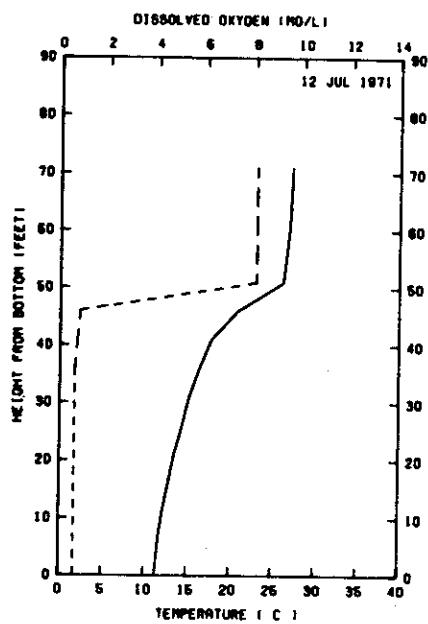

RELEASE TEMP. 16.7  
RELEASE D.O. 9.5

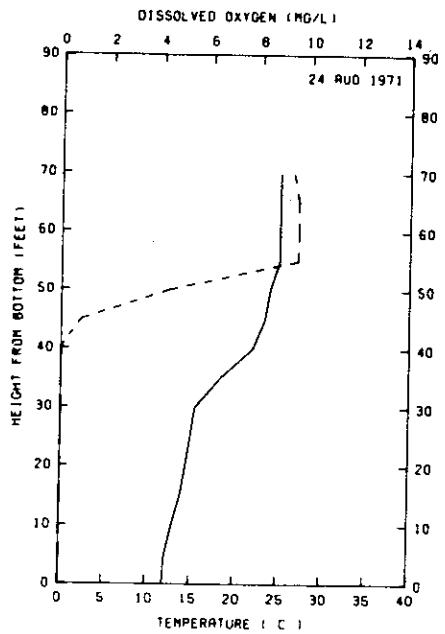

RELEASE TEMP. 17.9  
RELEASE D.O. 9.4

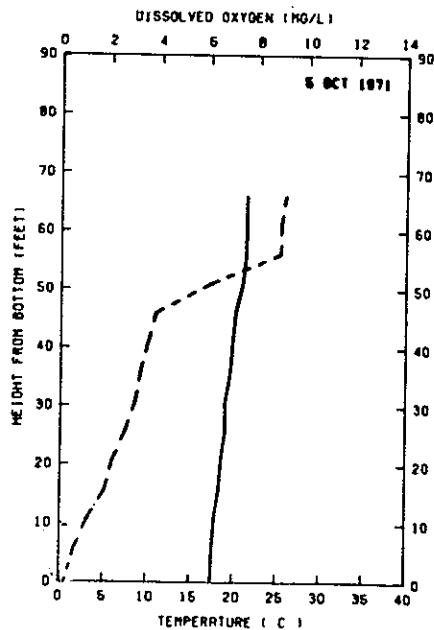



RELEASE TEMP. 19.7  
RELEASE D.O. 9.6

#### LEGEND

- WATER TEMPERATURE
- - DISSOLVED OXYGEN

#### SALAMONIE LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

8 JUN 1971-5 OCT 1971

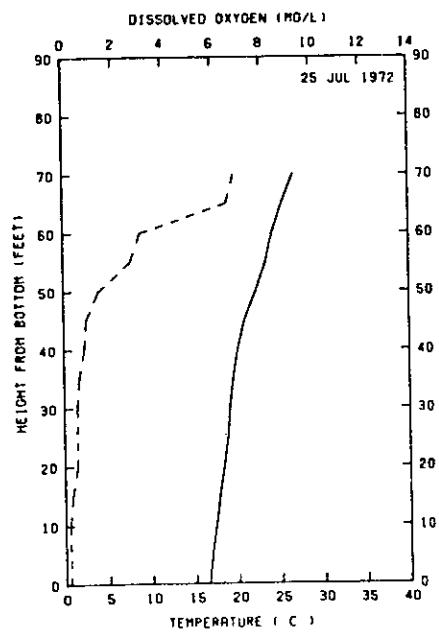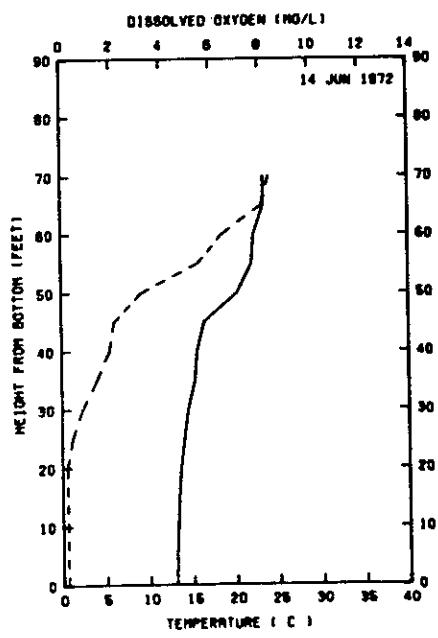


LEGEND


— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

SALAMONIE LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES


14 JUN 1972-25 JUL 1972

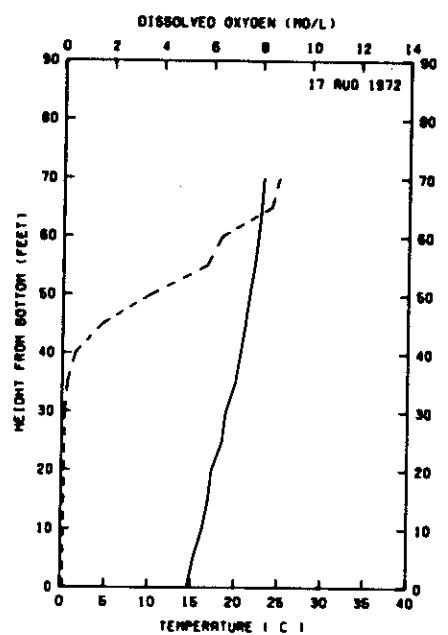


RELEASE TEMP. 18.7  
RELEASE D.O. 10.1

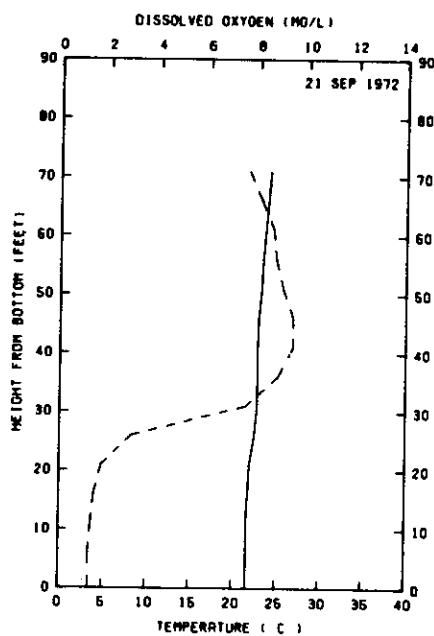

RELEASE TEMP. 18.9  
RELEASE D.O. 7.8

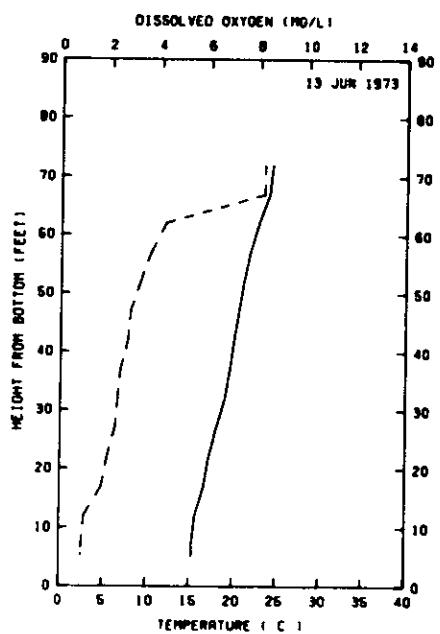

RELEASE TEMP. 18.3  
RELEASE D.O. 8.6

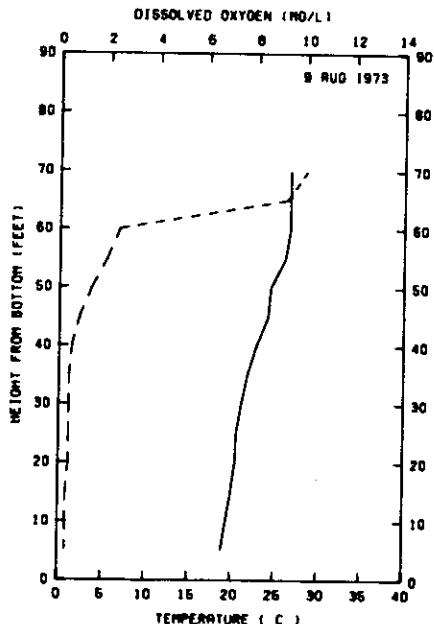



RELEASE TEMP. 22.4  
RELEASE D.O. NA

#### LEGEND

- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

#### SALAMONIE LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

17 AUG 1972-9 AUG 1973

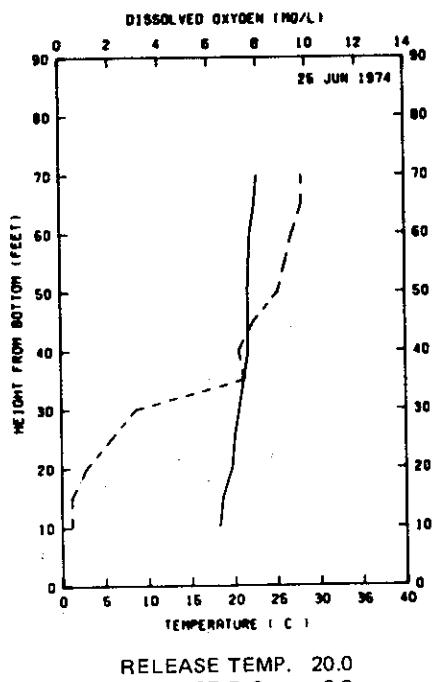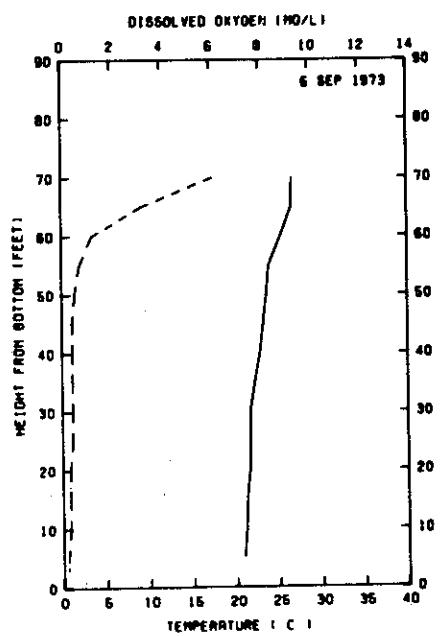


LEGEND


- WATER TEMPERATURE
- - DISSOLVED OXYGEN

SALAMONIE LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES


6 SEP 1973-25 JUN 1974

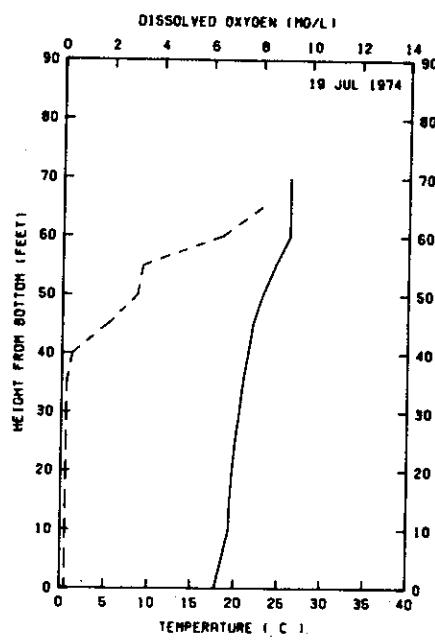

RELEASE TEMP. 21.0  
RELEASE D.O. 8.9

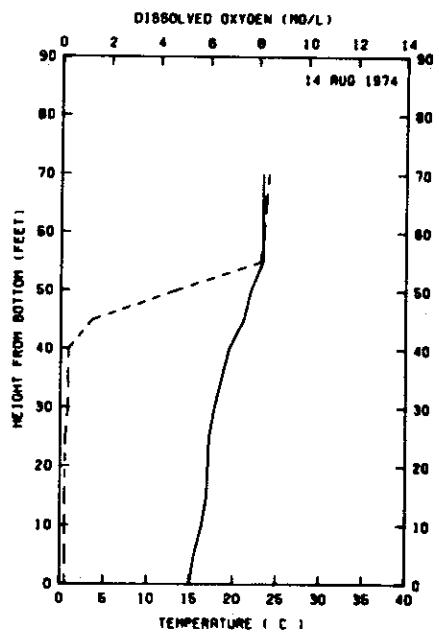

RELEASE TEMP. 21.1  
RELEASE D.O. NA

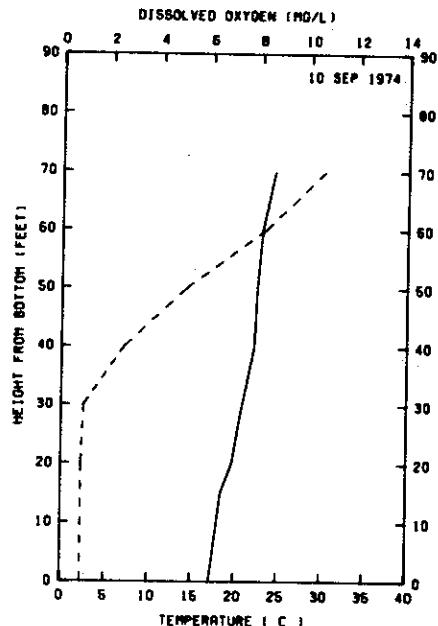

RELEASE TEMP. 21.1  
RELEASE D.O. 9.5


#### LEGEND

- WATER TEMPERATURE
- DISSOLVED OXYGEN


SALAMONIE LAKE

#### TEMPERATURE AND DISSOLVED OXYGEN PROFILES


19 JUL 1974–10 SEP 1974

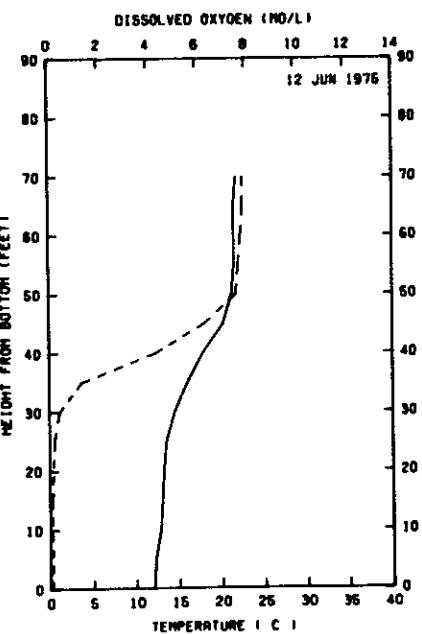

RELEASE TEMP. 19.0  
RELEASE D.O. NA

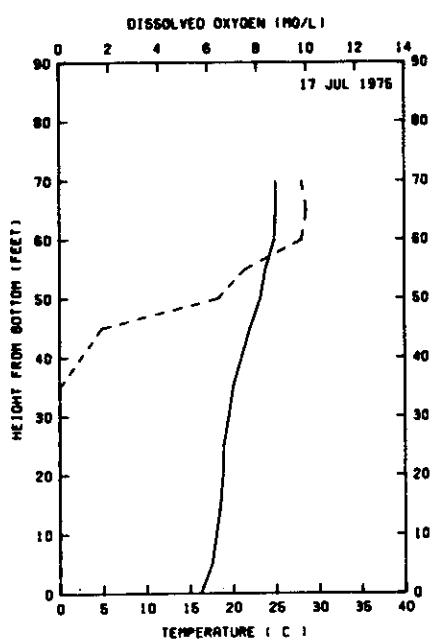

RELEASE TEMP. 25.6  
RELEASE D.O. NA

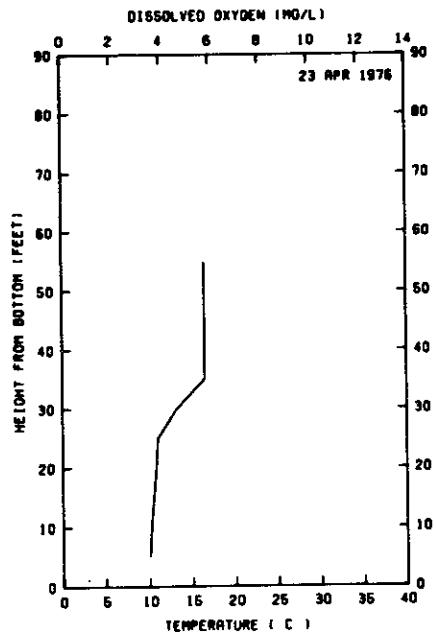


RELEASE TEMP. 16.22  
RELEASE D.O. NA


LEGEND  
 — WATER TEMPERATURE  
 - - - DISSOLVED OXYGEN

SALAMONIE LAKE  
 TEMPERATURE AND  
 DISSOLVED OXYGEN PROFILES


12 JUN 1975-23 APR 1976

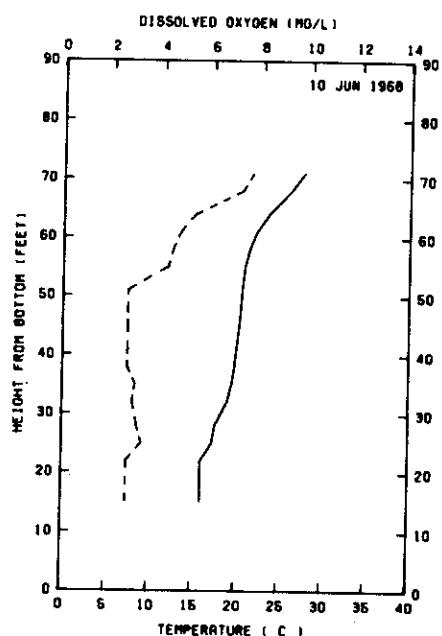


RELEASE TEMP. 21.8  
RELEASE D.O. 8.1

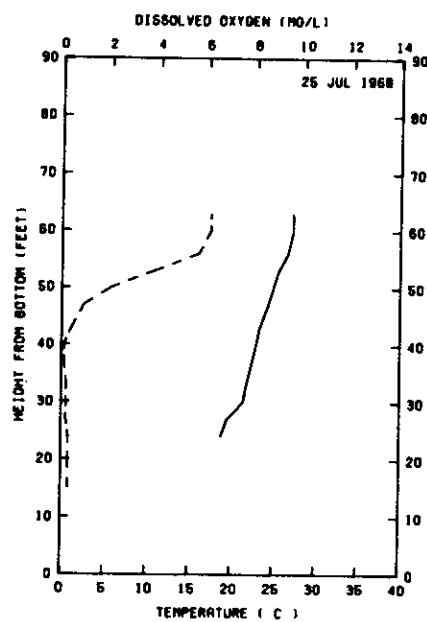

RELEASE TEMP. 25.2  
RELEASE D.O. 7.6

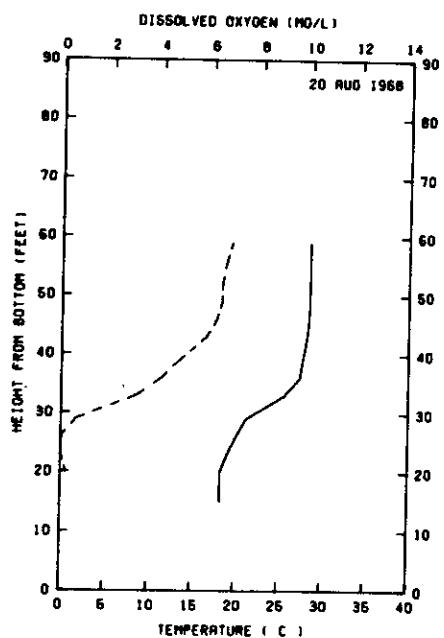

RELEASE TEMP. 26.7  
RELEASE D.O. 7.7

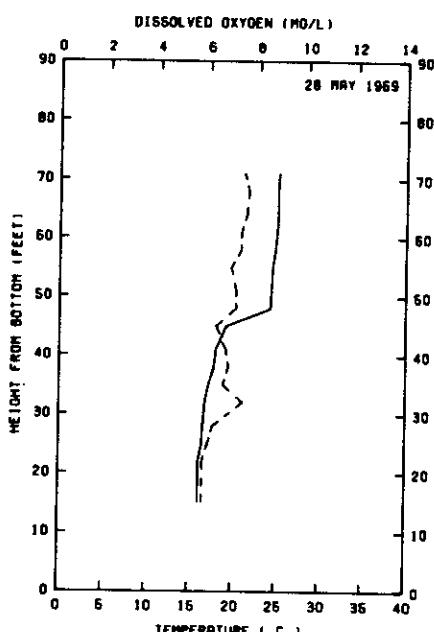


RELEASE TEMP. 21.9  
RELEASE D.O. 7.9

#### LEGEND


- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

#### SARDIS LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES


10 JUN 1968–28 MAY 1969

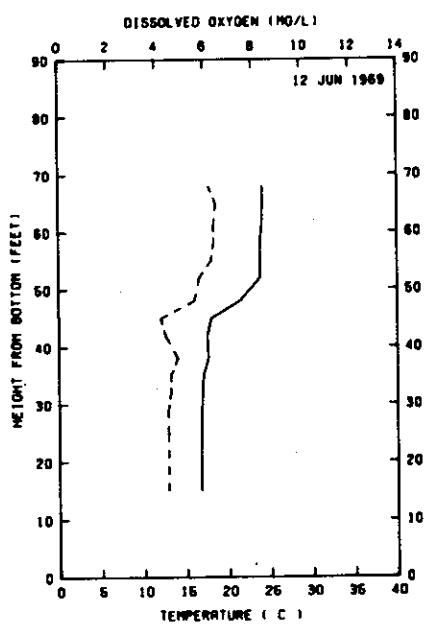

RELEASE TEMP. 20.8  
RELEASE D.O. 8.7

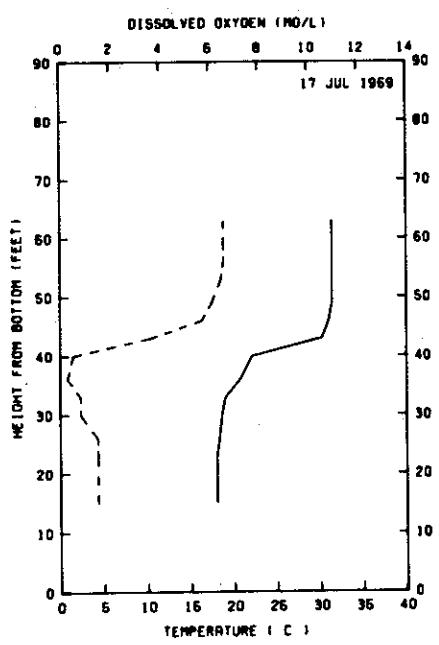

RELEASE TEMP. 26.5  
RELEASE D.O. 7.9

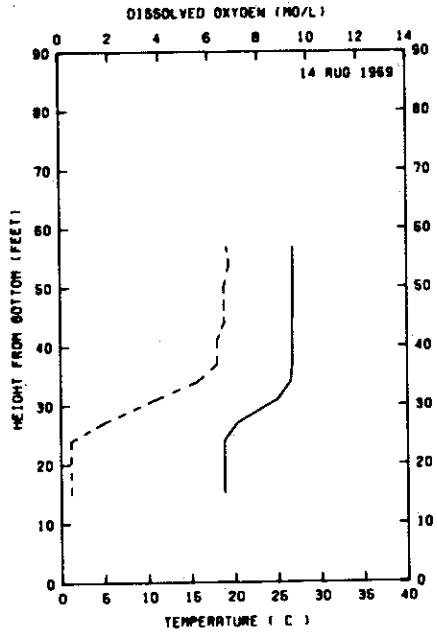


RELEASE TEMP. 25.9  
RELEASE D.O. 7.8


LEGEND  
 — WATER TEMPERATURE  
 - - - DISSOLVED OXYGEN

SARDIS LAKE  
**TEMPERATURE AND  
 DISSOLVED OXYGEN PROFILES**


12 JUN 1969-14 AUG 1969

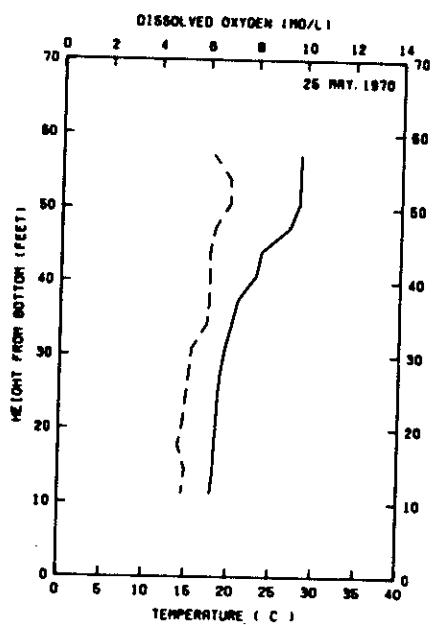


RELEASE TEMP. 21.2  
RELEASE D.O. 8.2

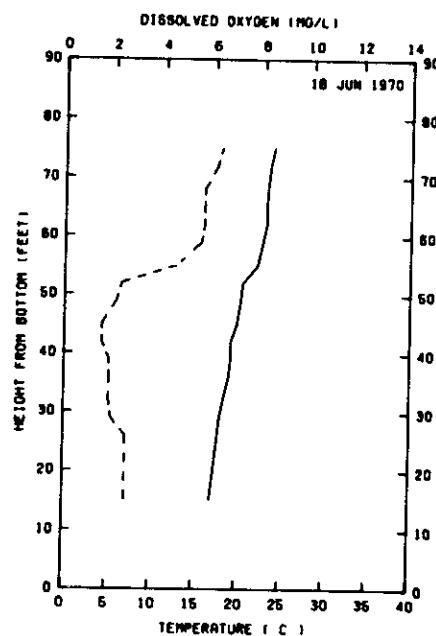

RELEASE TEMP. 21.6  
RELEASE D.O. 8.1

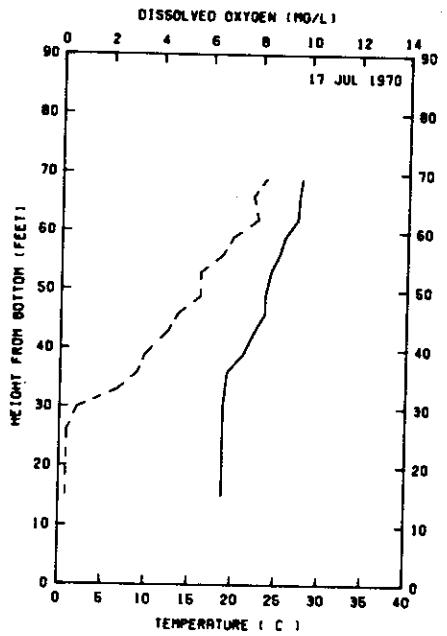

RELEASE TEMP. 23.8  
RELEASE D.O. 7.6

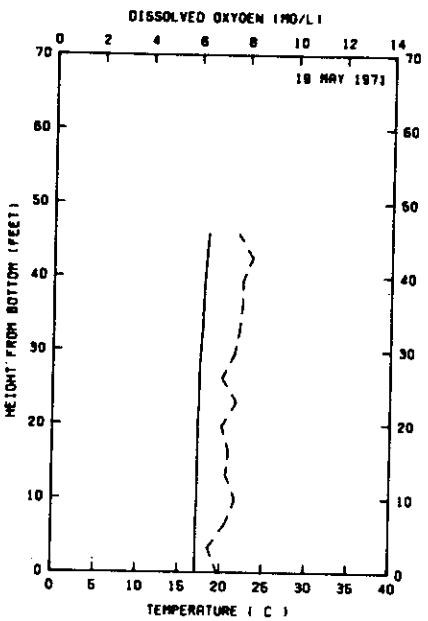

RELEASE TEMP. 19.0  
RELEASE D.O. 9.0


#### LEGEND

- WATER TEMPERATURE
- - - DISSOLVED OXYGEN

#### SARDIS LAKE TEMPERATURE AND DISSOLVED OXYGEN PROFILES

25 MAY 1970-19 MAY 1971

PLATE 37

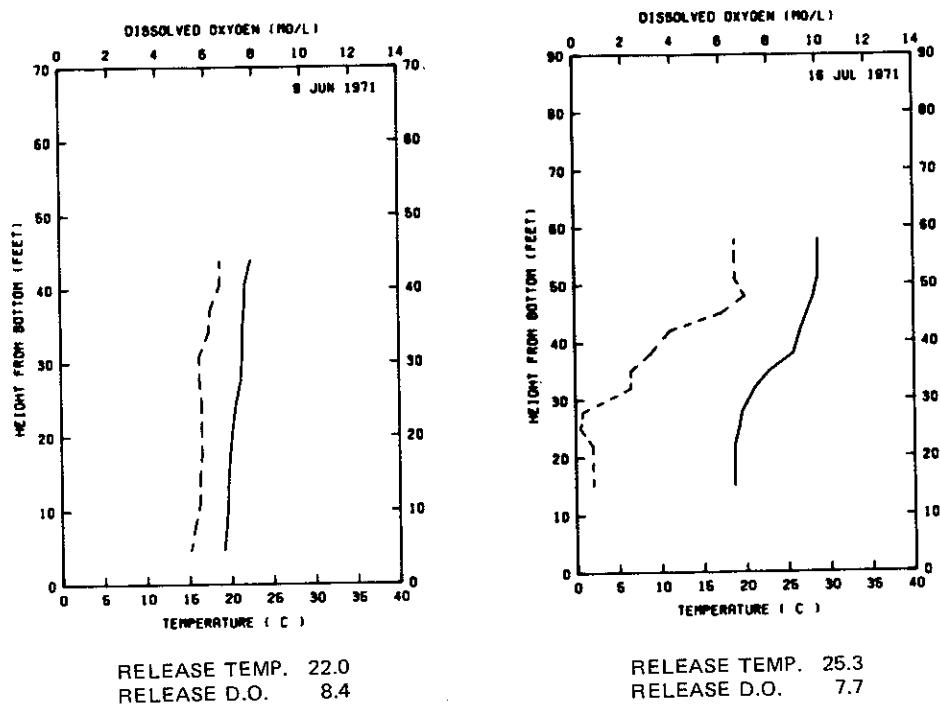

LEGEND

— WATER TEMPERATURE  
- - - DISSOLVED OXYGEN

SARDIS LAKE  
TEMPERATURE AND  
DISSOLVED OXYGEN PROFILES

9 JUN 1971-16 JUL 1971

**Appendix A: Hydraulic and Predicted Data**

A1

Outlet Works Structures	Date	Release		Temperature, °C Observed Predicted	D.O., mg/l Entering Outlet Works*	Δh ft	Structure Discharge cfs	Structure Design Discharge cfs
		Observed	Downstream					
Arkabutla	17 Aug 1970	26.3	26.3	NA	NA	46.88	1440	5000
	12 Aug 1972	28.3	27.6	6.90	1.9	49.60	1050	
C. J. Brown	4 Jun 1974	20.8	20.9	7.80	8.7	34.80	27	2500
	27 Aug 1974	21.7	25.1	10.4	0.3	34.70	40	
	24 Sep 1974	NA	18.0	10.4	4.4	36.70	40	
	17 Jun 1975	15.6	17.3	9.40	3.2	48.50	56	
	24 Jul 1975	22.6	25.5	7.80	7.8	48.60	50	
	20 Aug 1975	25.5	24.9	7.60	6.9	48.90	15	
Crooked Creek	17 Jul 1973	23.0	23.2	7.8	5.5	42.06	42	4500
	10 Oct 1973	17.1	16.1	9.0	8.0	40.05	205	
	12 Jun 1974	17.6	17.9	9.0	7.6	41.81	36	
East Branch	16 Sep 1970	17.2	18.5	9.0	8.7	128.64	49	4400
	3 Jun 1971	14.0	11.1	9.8	9.7	150.20	76	
	21 Jul 1971	18.9	19.6	8.7	8.7	140.47	185	
	29 Aug 1971	19.5	19.6	9.8	8.9	126.42	160	
	30 Aug 1972	19.2	20.2	8.9	7.6	129.92	170	
	20 Jun 1973	13.6	12.6	9.4	9.9	149.63	270	
	30 Aug 1973	21.0	21.3	8.4	8.2	133.37	195	
	17 Jun 1974	14.3	11.4	9.6	11.2	151.05	45	
	15 Jul 1974	20.0	16.4	9.1	10.5	143.32	245	
	29 Jul 1974	19.0	17.9	9.0	9.3	141.03	165	
	23 Aug 1974	22.3	21.4	9.1	9.0	132.69	155	
East Lynn	21 Jul 1976	23.2	27.2	7.80	7.8	51.40	14	6900
	26 Aug 1976	22.5	26.2	7.80	7.7	51.32	17	
	6 Oct 1976	19.3	20.1	8.70	7.4	50.13	119	

(Continued)

\* Predicted by SELECT to be entering outlet works prior to reaeration.

(Sheet 1 of 3)

Outlet Works Structures	Date	Release Temperature, °C		D.O., mg/l	Entering Outlet Works		Structure Discharge cfs
		Observed	Predicted		Observed Downstream	Δh ft	
Enid	16 Jul 1969	24.1	23.2	7.90	0.9	56.65	1370
	18 Aug 1971	25.7	25.0	6.80	2.0	59.61	684
Grayson	19 May 1976	17.0	15.0	9.50	9.5	57.77	28
	18 Jun 1976	21.8	24.3	8.40	9.7	57.80	26
	20 Jul 1976	22.4	21.8	8.00	6.5	59.79	27
	23 Aug 1976	20.0	23.7	7.90	0.5	58.94	118
	5 Sep 1976	18.4	20.5	8.6	7.9	55.18	87
Grenada	15 Jul 1969	28.2	26.0	7.70	3.1	52.61	2390
	24 Aug 1970	26.3	26.2	7.60	4.6	50.98	5100
	18 Aug 1971	27.9	27.4	6.80	5.5	49.90	2640
	9 Aug 1972	27.6	27.4	6.90	3.5	50.15	3390
							2610
Mississinewa	30 Jun 1971	17.0	17.0	9.40	1.0	74.87	9000
	6 Aug 1971	15.0	14.4	NA	0.2	74.90	110
	8 Sep 1971	21.1	19.9	9.40	1.0	74.83	166
	5 Jul 1972	19.4	18.1	9.30	2.3	70.46	1860
	2 Aug 1972	23.9	23.9	NA	1.1	74.83	86
	26 Apr 1973	9.2	9.2	12.6	2.6	89.71	542
	26 Jun 1973	24.4	19.2	5.60	0.3	74.86	245
	27 Jul 1973	23.6	22.6	8.20	0.6	72.37	835
	22 Aug 1973	23.3	22.5	8.80	1.2	72.94	2030
	26 Jun 1974	19.7	19.6	9.60	3.2	70.55	1862
	16 Jul 1974	25.8	22.5	8.70	1.0	76.07	66
	15 Aug 1974	24.4	21.6	9.40	2.1	76.02	66
	11 Sep 1974	NA	22.3	8.80	5.5	75.84	104
	13 Jun 1975	19.4	17.1	7.80	2.1	72.62	670
Salamonie	8 Jun 1971	17.2	14.1	11.00	2.9	69.73	26
	12 Jul 1971	16.7	14.6	9.50	0.8	72.89	76
	24 Aug 1971	17.9	17.7	9.4	0.0	74.70	28

(Continued)

(Sheet 2 of 3)

Outlet Works Structures	Date	Release Temperature, °C		Observed Downstream	D.O., mg/l	Structure Design Discharge cfs
		Observed	Predicted			
Salamonie (Continued)	5 Oct 1971	19.7	18.3	9.60	1.9	67.94
	14 Jun 1972	17.7	15.4	8.20	1.4	74.31
	25 Jul 1972	21.3	19.4	9.70	0.6	73.04
	17 Aug 1972	18.7	19.5	10.10	0.2	74.45
	21 Sep 1972	18.9	22.3	7.80	4.7	71.94
	13 Jun 1973	18.3	17.6	8.60	1.9	72.63
	9 Aug 1973	22.4	21.7	NA	0.4	74.57
	6 Sep 1973	23.3	22.0	9.60	0.4	74.38
	25 Jun 1974	20.0	19.8	9.90	2.5	71.07
	19 Jul 1974	21.0	20.7	8.90	0.5	74.52
	14 Aug 1974	21.1	18.5	NA	0.3	74.73
	10 Sep 1974	21.1	21.2	9.5	0.5	73.62
	12 Jun 1975	19.0	15.8	NA	1.8	73.49
	17 Jul 1975	25.6	19.8	11.4	0.1	74.44
	23 Apr 1976	16.2	14.6	NA	59.97	22
Sardis	10 Jun 1968	21.8	21.6	8.10	4.2	65.72
	25 Jul 1968	25.2	23.6	7.60	1.7	58.99
	20 Aug 1968	26.7	26.5	7.70	4.5	57.73
	28 May 1969	21.9	21.5	7.90	6.9	66.93
	12 Jun 1969	20.8	20.3	8.70	5.3	63.43
	17 Jul 1969	26.5	26.1	7.90	3.5	58.00
	14 Aug 1969	25.9	25.6	7.80	5.5	52.90
	25 May 1970	21.2	21.9	8.20	5.8	72.05
	18 Jun 1970	21.6	21.3	8.10	3.9	69.05
	27 Jul 1970	23.8	23.2	7.60	4.9	64.12
	19 May 1971	19.0	17.5	9.00	7.5	65.28
	9 Jun 1971	22.0	20.7	8.40	5.9	60.74
	16 Jul 1971	25.3	25.2	7.70	4.1	55.79

A4

73.15543 (Sheet 3 of 3)

943.48148

**Appendix B: Example Case for Prediction of Reaeration  
for Gated-Conduit Outlet Works**

### Synopsis of Procedure

1. Based upon the analysis presented earlier, the D.O. released from gated conduits may be computed if the following conditions are satisfied:
  - a. Flow issued from under the bottom edge of the control gate.
  - b. The flow rates were such that free-surface flow existed in the conduit; i.e., the conduit was not flowing full.
  - c. The outlet portal of the conduit was not submerged by the tailwater.
2. The data required are the following:
  - a. Lake temperature and D.O. profiles.\*
  - b. Forebay and tailwater elevations.
  - c. Structure details, i.e., outlet configuration and location.
  - d. Discharge rate.
  - e. Upstream morphometry.
3. The recommended calculation sequence is as follows:
  - a. Predict the flow weighted average temperature and D.O. entering the outlet works with the computer code SELECT (Bohan and Grace 1973).
  - b. Adjust the escape coefficient for the temperature with the equation

$$c_T = c_{20} 1.022^{T-20}$$

where

$$c_T = \text{temperature-adjusted escape coefficient, ft}^{-1}$$
$$T = \text{Predicted release temperature, } ^\circ\text{C}$$
$$c_{20} = \text{Escape coefficient at } 20^\circ\text{C (or } c_{20} = 0.045 \text{ per foot)}$$

---

\* Either observed or predicted with a numerical model such as WESTEX (Loftis, in press). (References mentioned in this Appendix are more fully identified in the References section at the end of the main text.)

- c. Compute the oxygen deficit  $D$  (mg/l) entering the outlet works by

$$D = C_{sat} - C_{SEL}$$

where

$C_{sat}$  = oxygen saturation concentration for predicted release temperature, mg/l

$C_{SEL}$  = D.O. entering outlet works prior to reaeration, predicted by SELECT, mg/l

- d. Calculate the difference in forebay and tailwater elevations,  $\Delta h$ , ft.
- e. Predict the final or release deficit from

$$D_f = D_i \exp (-c_T \Delta h)$$

where

$D_f$  = downstream deficit, mg/l

- f. Calculate the released D.O. concentration from

$$C_{rel} = C_{sat} - D_f$$

#### Example Case

4. An example case is presented below:

- a. The temperature and D.O. profiles and hydraulic data for Mystery Lake are presented in Tables B1 and B2.
- b. These data are input to SELECT (presented in Appendix C) and the following predictions are obtained:

$$T = 18.34 ^\circ\text{C}$$

$$C_{SEL} = 3.95 \text{ mg/l}$$

- c. The temperature-corrected escape coefficient is

$$c_T = 0.045 (1.022)^{(T-20)}$$

$$c_{18.34} = 0.045 (1.022)^{(18.34-20)} \\ = 0.043 \text{ ft}^{-1}$$

and

$$\Delta h = 400 - 340 = 60 \text{ ft}$$

d. The upstream deficit is

$$D_i = C_{sat} - 3.95 \\ = 9.5 - 3.95 \\ = 5.55 \text{ mg/l}$$

e. The downstream deficit after reaeration is

$$D_f = D_i \exp (-c\Delta h) \\ = 5.55 \exp [-0.043 (60)] \\ = 0.4 \text{ mg/l}$$

f. Released D.O. after reaeration is

$$C_{rel} = C_{sat} - D_f \\ = 9.5 - 0.4 \\ = 9.1 \text{ mg/l}$$

Table B1  
Mystery Lake Profiles

<u>Elevation</u> ft	<u>Depth</u> ft	<u>Temperature</u> °C	<u>D.O.</u> mg/l
400	0	28.0	8.0
395	5	27.6	8.0
390	10	27.3	8.0
385	15	26.0	8.0
380	20	25.0	7.3
375	25	21.0	4.3
370	30	14.0	3.1
365	35	12.0	2.8
360	40	10.1	2.6
355	45	10.0	2.5
350	50	9.9	2.3

Table B2  
Hydraulic and Geometric Data

Discharge: 225 cfs

Port Location: Elevation 372 ft


Port Area: 16 ft<sup>2</sup>

Upstream Morphometry:

<u>Elevation, ft</u>	<u>Width, ft</u>
400	1500
390	1200
380	1900
370	800
360	600
350	100

Forebay Elevation: 400 ft

Tailwater Elevation: 340 ft



## Appendix C: SELECT Example

c1

```

1000      ***MYSTERY LAKE WITHDRAWAL
1010      ***FILES          05   06
1020      ***DATA SETS       1
1030      ***PRINT INPUT
1040      ***MYSTERY LAKE EXAMPLE CASE
1050      ***ENGLISH
1060      ***TABLES          1
1070      ***THICKNESS        2.0
1080      ***INTERVAL         2
1090      ***SURFACE          400.
1100      ***BOTTOM           350.
1110      ***NUMBER OF WIDTHS 6
1120      ***ELEVATION WIDTH
1130      ***      400.    1500.
1140      ***      390.    1200.
1150      ***      380.    1000.
1160      ***      370.    800.
1170      ***      360.    600.
1180      ***      350.    200.
1190      ***PORTS            1
1200      ***AREA             16.
1210      ***ELEVATION        372.
1220      ***FLOW              225.
1230      ***NUMBER OF TEMPS  11
1240      ***TEMPERATURE DEGREES CENTIGRADE
1250      ***DEPTH TEMP
1260      ***      0.0     28.0
1270      ***      5.0     27.8
1280      ***     10.0     27.3
1290      ***     15.0     26.0
1300      ***     20.0     25.0
1310      ***     25.0     21.0
1320      ***     30.0     14.0
1330      ***     35.0     12.0
1340      ***     40.0     10.1
1350      ***     45.0     10.0
1360      ***     50.0     9.9
1370      ***QUALITIES        1
1380      ***NUMBER OF DISSOLVED OXYGEN 11
1390      ***DEPTH DO
1400      ***      0.0     8.0
1410      ***      5.0     8.0
1420      ***     10.0     8.0
1430      ***     15.0     7.3
1440      ***     20.0     5.1
1450      ***     25.0     4.3
1460      ***     30.0     3.1
1470      ***     35.0     2.8
1480      ***     40.0     2.6
1490      ***     45.0     2.5
1500      ***     50.0     2.3
1510      ***STOP

```

**MYSTERY LAKE WITHDRAWAL**

**MYSTERY LAKE EXAMPLE CASE**


**UNITS ARE FEET**

PORT ELEVATION	372.000
PORT AREA	16.000
DISCHARGE, VOLUME FLOW PER SEC.	225.0000

TOTAL DISCHARGE, VOLUME PER SEC    225.0000

LOWER WITHDRAWAL LIMIT, HEIGHT ABOVE BOTTOM	4.469
UPPER WITHDRAWAL LIMIT, HEIGHT ABOVE BOTTOM	37.313
OUTFLOW DENSITY	0.99845
OUTFLOW TEMPERATURE	18.34
OUTFLOW CONCENTRATION OF DISSOLVED OXYGEN	3.95

ELEVATION	DEPTH	WIDTH	DENSITY	VELOCITY	FLOW	TEMPERATURE DISSOLVED OX
399.000	1.00	1470.0	0.99628	0.	0.	27.96
395.000	5.00	1350.0	0.99632	0.	0.	27.80
391.000	9.00	1230.0	0.99643	0.	0.	27.40
387.000	13.00	1140.0	0.99667	0.	0.	26.52
383.000	17.00	1060.0	0.99692	0.0029	6.0541	25.60
379.000	21.00	980.0	0.99728	0.0098	19.1980	24.20
375.000	25.00	900.0	0.99802	0.0180	32.4015	21.00
371.000	29.00	820.0	0.99907	0.0182	29.8503	15.40
367.000	33.00	740.0	0.99943	0.0115	16.9812	12.80
363.000	37.00	660.0	0.99961	0.0051	6.7425	11.24
359.000	41.00	560.0	0.99972	0.0010	1.1539	10.08
355.000	45.00	400.0	0.99973	0.0000	0.0000	10.00
351.000	49.00	240.0	0.99974	0.	0.	9.92

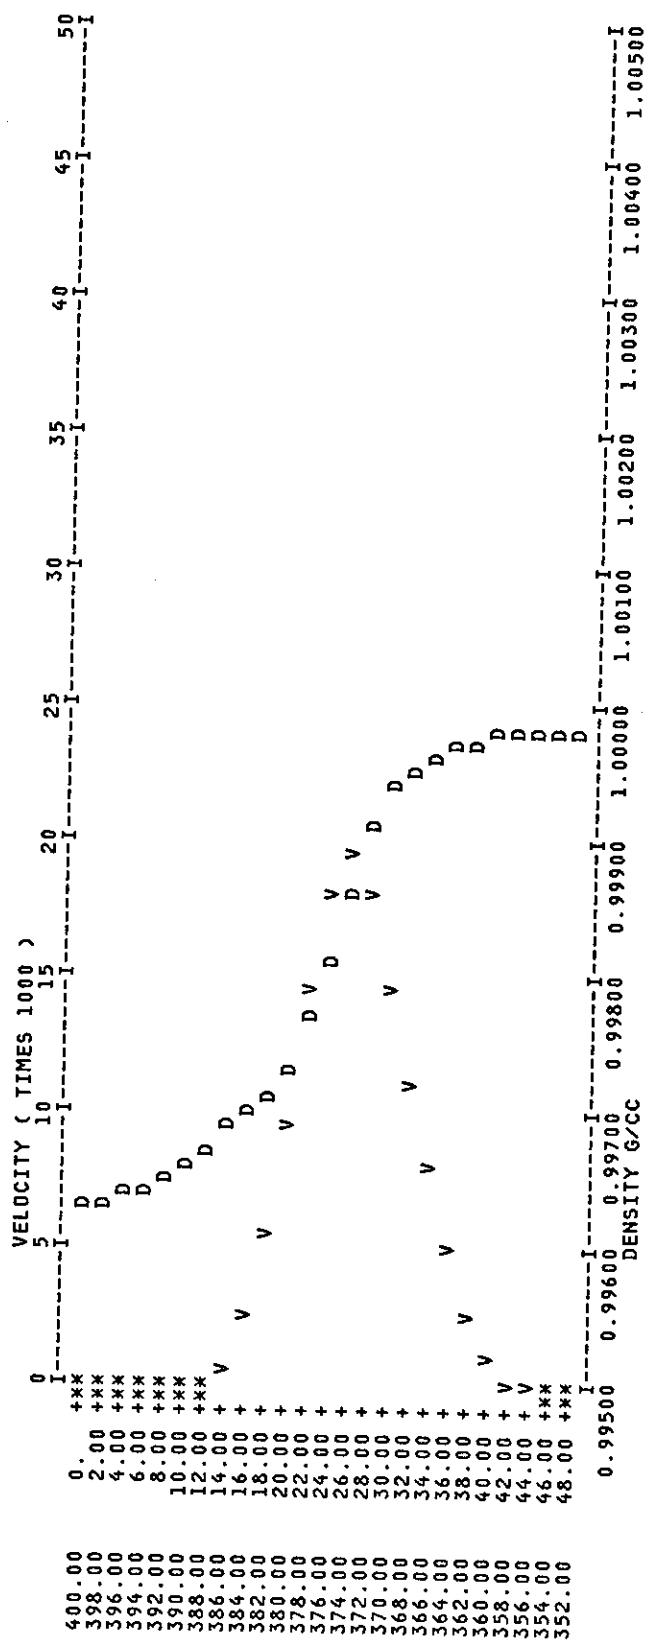

C5

In accordance with letter from DAEN-RDC, DAEN-ASI dated 22 July 1977, Subject: Facsimile Catalog Cards for Laboratory Technical Publications, a facsimile catalog card in Library of Congress MARC format is reproduced below.

Wilhelms, Steven C.

Reaeration through gated-conduit outlet works : Final report / by Steven C. Wilhelms, Dennis R. Smith (Hydraulics Laboratory, U.S. Army Engineer Waterways Experiment Station) ; prepared for Office, Chief of Engineers, U.S. Army ; monitored by Environmental Laboratory, U.S. Army Engineer Waterways Experiment Station ; Springfield, Va. ; available from NTIS, 1981.

26, [14] p., [19] leaves of plates : ill. ; 27 cm. -- (Technical report / U.S. Army Engineer Waterways Experiment Station ; E-81-5)

Cover title.

"March 1981."

"Under CWIS No. 31402 (EWQOS Work Unit 31604 (III A.1))."

Bibliography: p. 26.

1. Hydraulic gates. 2. Oxygen. 3. Reservoirs -- Aeration. 4. Temperature. I. Smith, Dennis R. II. United States. Army. Corps of Engineers. Office

Wilhelms, Steven C.

Reaeration through gated-conduit outlet works : ... 1981.  
(Card 2)

of the Chief of Engineers. III. United States. Army Engineer Waterways Experiment Station. Hydraulics Laboratory. IV. United States. Army Engineer Waterways Experiment Station. Environmental Laboratory. V. Title VI. Series: Technical report (United States. Army Engineer Waterways Experiment Station) ; E-81-5.  
TA7.W34 no.E-81-5